


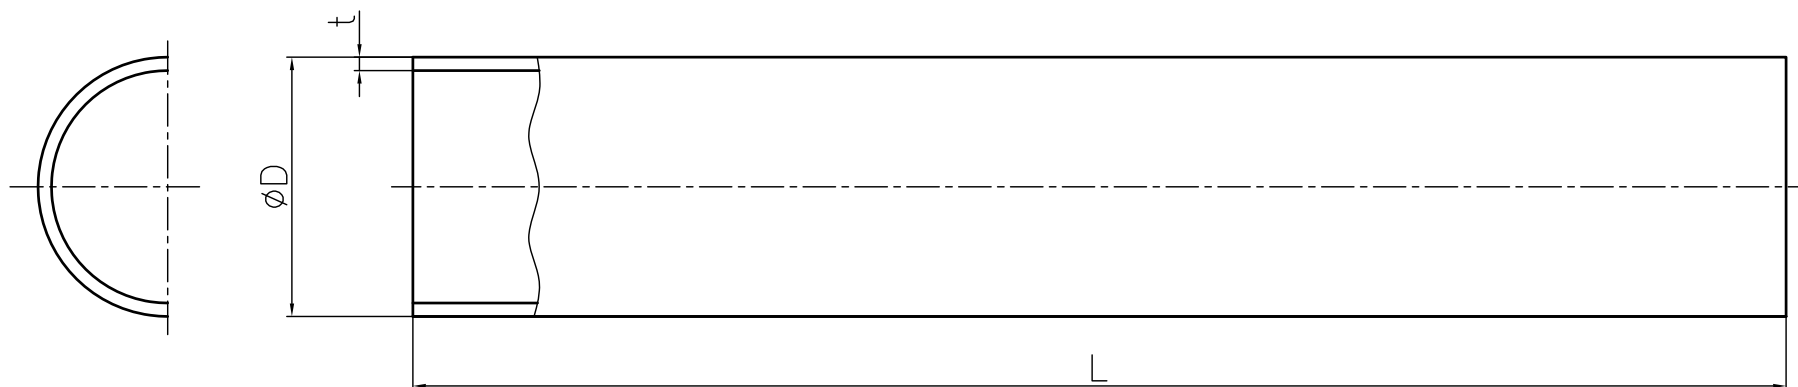


寸法表

単位: mm

呼び径	D（外径）			t		L		1mあたりの重量 （参考） （kg/m）
	基準 寸法	外径の許容差		厚さ		長さ		
		最大 最小	平均	基準 寸法	許容差	基準 寸法	許容差	
13 ^{mm}	18.0	±0.2	±0.2	2.5	±0.2	4000	+30 -10	0.174
16	22.0	±0.2	±0.2	3.0	±0.3			0.256
20	26.0	±0.2	±0.2	3.0	±0.3			0.310
25	32.0	±0.2	±0.2	3.5	±0.3			0.448
30	38.0	±0.3	±0.2	3.5	±0.3			0.542
40	48.0	±0.3	±0.2	4.0	±0.3	4000 又は 5000		0.791
50	60.0	±0.4	±0.2	4.5	±0.4			1.122
65	76.0	±0.5	±0.2	4.5	±0.4			1.445
75	89.0	±0.5	±0.2	5.9	±0.4			2.202
100	114.0	±0.6	±0.2	7.1	±0.5			3.409
125	140.0	±0.8	±0.3	7.5	±0.5			4.464
150	165.0	±1.0	±0.3	9.6	±0.6		6.701	

JIS K 6742

水道用硬質塩化ビニル管				U-PVC							
部番		名 称		個数		材 質		備 考			
作図		岩切まゆみ		旭有機材株式会社							
検図		河野宏幸									
承認		甲正健二									
2021年3月10日				図面 名称		AVビニルパイプ 水道用硬質塩化ビニル管 (VPW) 13mm ~ 150mm					
尺度											
個別引合 No.											
納入先						図 番		PS-60013JJ			