


50mm (2") ~ 150mm (6")

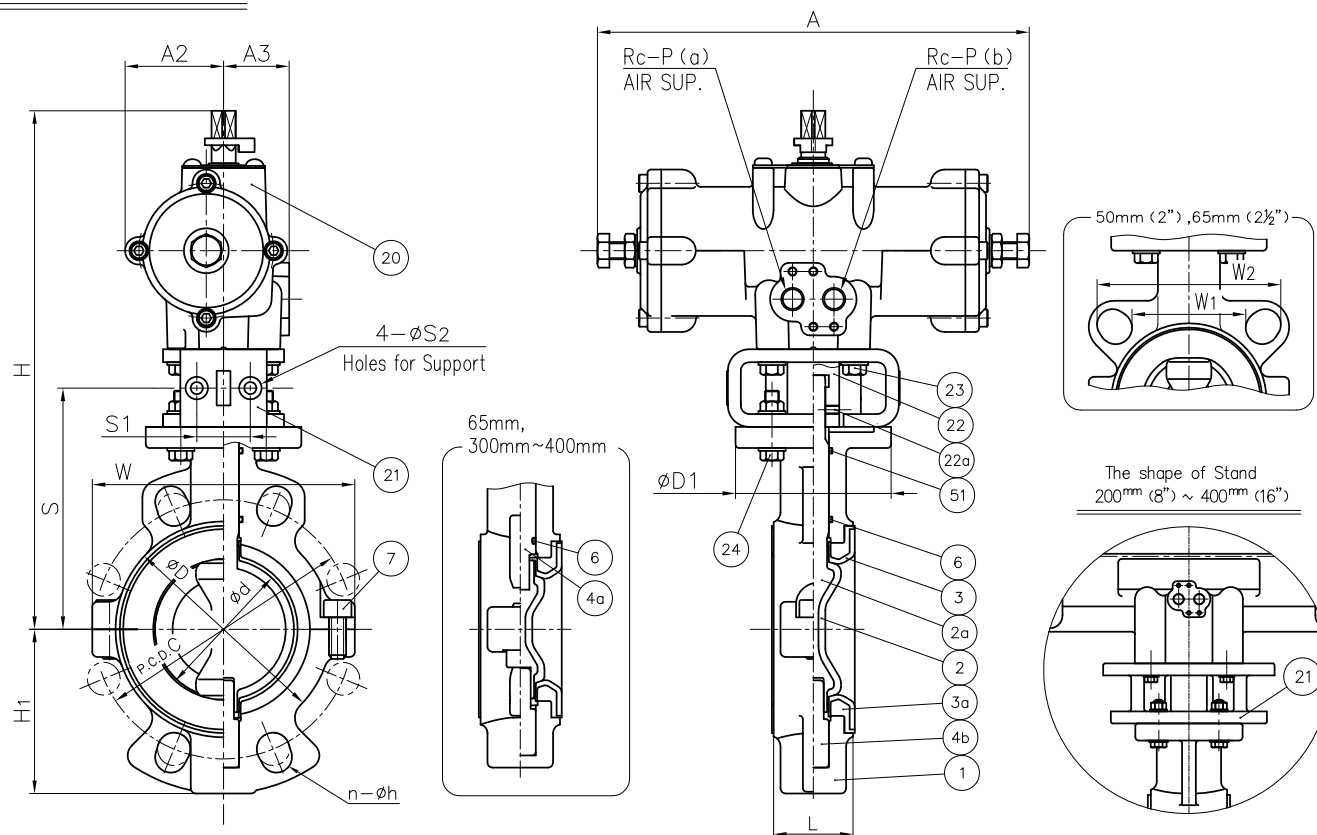

NOTE.

1. Operating pressure: 0.4~0.7 MPa G
2. Valve open : Port (a) Exhaust Port (b) Supply
Valve Shut : Port (a) Supply Port (b) Exhaust
3. The shape and appearance of assembly differ a little with nominal size compared to this drawing.
4. Dimensions "L" is equivalent to ISO5752 flangeless (wafer) short.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE	d	JIS 10K			D	D ₁	L	H	H ₁	W	W ₁	W ₂	A	A ₂	A ₃	S	S ₁	S ₂	P	ACTUATOR MODEL
		C	n	h																
50mm	2"	55 (120)	2 (4)	(19)	90	90	43	268	61	116	66	106	210	46	36	122.5	32	7	1/4	TA2A-050D
65	2½"	65 (140)	2 (4)	(19)	110	90	46	298	80	146	78	121	250	57	38	137.5	32	7	1/4	TA2A-063D
80	3	80	150	4 (8)	125	90	46	302	95	152	—	—	250	57	38	141.5	32	7	1/4	TA2A-063D
100	4	100	175	4 (8)	154	90	52	351	103	174	—	—	292	71	45	157.5	32	7	1/4	TA2A-080D
125	5	125	210	4 (8)	181	125	56	411	120	206	—	—	362	85.5	57	183.5	42	9	1/4	TA2A-100D
150	6	150	240	4 (8)	211	125	56	428	137	236	—	—	362	85.5	57	200.5	42	9	1/4	TA2A-100D
200	8	191	290	4 (12)	253	125	60	502	163	290	—	—	440	90	60	—	—	—	1/4	TA2A-125D
250	10	245 (355)	4 (12)	(25)	320	125	68	583	200	340	—	—	532	113	68	—	—	—	1/4	TA2A-160D
300	12	296	400	4 (16)	371	180	78	638	230	410	—	—	532	113	68	—	—	—	1/4	TA2A-160D
350	14	330	445	4 (16)	416	180	92	727	255	460	—	—	664	139	85	—	—	—	3/8	TA-200D
400	16	380	510	4 (16)	476	180	102	757	290	532	—	—	664	139	85	—	—	—	3/8	TA-200D

51	O-RING (B)	1	EPDM	
24	BOLT · NUT (B)	4 Sets	STAINLESS STEEL (SUS304)	
23	BOLT (D)	4	STAINLESS STEEL (SUS304)	
22a	SCREW (B)	1	STAINLESS STEEL (SUS304)	
22	JOINT	1	COPPER ALLOY (C3604)	
21	STAND	1	PPG CAST ALUMINUM ALLOY (AC12C)	Used for Size 50~150mm Used for Size 200~400mm
20	ACTUATOR	1	ALUMINUM ALLOYS DIE CASTINGS (ADC12) etc.	Meramin Baking Coat.
7	BOLT (A)	—	STAINLESS STEEL (SUS304)	Used for Size 50~125mm : 2 150~400mm : 4
6	O-RING (A)	1	EPDM	
4b	STEM (B)	1	STAINLESS STEEL (SUS304)	
4a	STEM (A)	1	STAINLESS STEEL (SUS304)	Used for Size 65mm, 300~400mm
3a	SEAT CUSHION	1	CR	
3	SEAT	1	PTFE	
2a	INSERTED METAL OF DISC	1	STAINLESS STEEL (SUS304)	
2	DISC	1	PTFE	
1	BODY	1	DUCTILE CAST IRON (FCI-S)	Epoxy Powder Coat
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	BUTTERFLY VALVE (TYPE 55S) PNEUMATIC MODEL TA TYPE ASS'Y DOUBLE ACTING JIS 10K 50 ^{mm} (2") ~ 400 ^{mm} (16")		
DRAWN	E.Emmei	DATE	SCALE
CHECKED	H.Kawano	JUN.20.2018	
APPROVED	K.Koushou	DRAWING No.	
		55-AA037JE	
SPECIAL ORDER No.			
ASAHI YUKIZAI CORPORATION			