


DIMENSIONS TABLE

Unit: mm

Nominal Size		ANSI Class 150					UNIT: mm							
		d					D ₁	L	t	H	H ₁	A	A ₁	P
			D	C	n	h								
50mm	2"	52	152	120.5	4	19	147	200	16	381	77.5	275	169	1/4
80	3	78	191	152.5	4	19	147	240	18	420	92.5	280	193	1/4
100	4	100	229	190.5	8	19	208	290	18	477	105	285	193	1/4

NOTE. 1. Operating pressure: 0.4MPa G
2. The shape and appearance of assembly differ a little with nominal size compared to this drawing

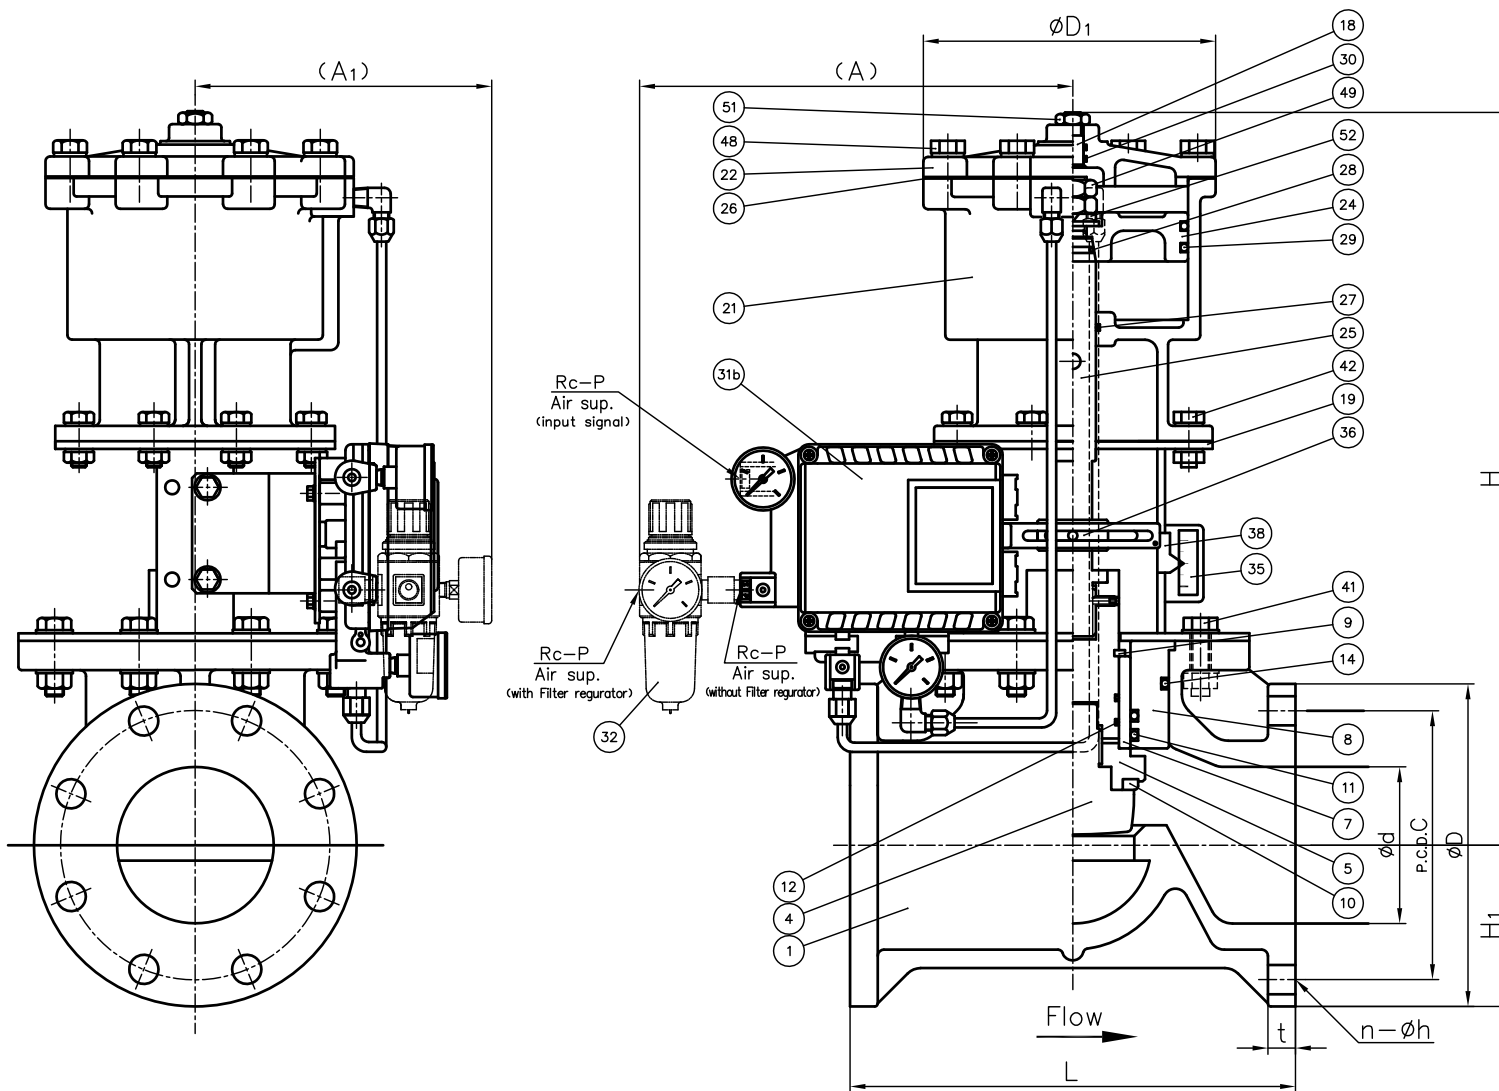

LIFT TABLE

Unit: mm

Nominal Size		PORT SIZE	
		S	L
50mm 2"		26	28
80 3		30	28
100 4		32	28

52	SPRING WASHER	1	SPRING STEEL	SUP
51	NUT (C)	1	STAINLESS STEEL	SUS304
49	NUT (A)	2	STAINLESS STEEL	SUS304
48	BOLT (G)	—	STAINLESS STEEL	SUS304
42	BOLT · NUT (B)	—	STAINLESS STEEL	SUS304
41	BOLT · NUT (A)	—	STAINLESS STEEL	SUS304
38	INDICATOR	1	STAINLESS STEEL	SUS304
36	COUPLING	1	COPPER ALLOY	C3604
35	INDICATOR SEAL	1	ACRYL	
32	FILTER REGULATOR	—	ZINC ALLOYS DIE CASTING (ZDC2) etc.	□ ARU2-02-8A-G □ nothing
31b	P-P POSITIONER	1	ALUMINUM ALLOYS DIE CASTINGS (ADC12) etc.	YT-1200L
30	O-RING (H)	2	NBR	
29	O-RING (G)	2	NBR	
28	O-RING (F)	1	NBR	
27	O-RING (E)	1	NBR	
26	PACKING	1	NBR	
25	STEM	1	STAINLESS STEEL	SUS304
24	PISTON (B)	1	CAST ALUMINUM ALLOY (AC2A)	
22	CYLINDER COVER	1	CAST ALUMINUM ALLOY (AC4C)	epoxy coat.
21	CYLINDER	1	CAST ALUMINUM ALLOY (AC4C)	epoxy coat.
19	STAND	1	STAINLESS STEEL	SUS304
18	SEAL ROD	1	STAINLESS STEEL	SUS304
14	O-RING (D)	1	□ EPDM □ Viflon-F	
12	O-RING (B)	2	□ Viflon-F □ Viflon-C	
11	O-RING (A)	2	□ others ()	
10	SEAT	1		
9	STOP RING	1	PVDF	
8	BUSH GUIDE	1	PVC	
7	BUSH	1	PTFE	
5	PISTON (A)	1	PVC	
4	PLUG	1	PVC	
1	BODY	1	PVC	

No.	DESCRIPTION	QTY.	MATERIAL	REMARKS
ITEM	CONTROL VALVE PNEUMATIC ACTUATED MODEL TYPE AV ASSY DOUBLE ACTING ANSI Class 150 : 50mm (2") ~ 100mm (4") with P-P POSITIONER, FILTER REGULATOR			
DRAWN	M.Iwakiri	DATE	SCALE	
CHECKED	Y.Sato	NOV.1.2024		
APPROVED	K.Yoshino	DRAWING No.		
SPECIAL ORDER No.		CV-AA034AEm		
ASAHI YUKIZAI CORPORATION				