



UNIT: mm

DIMENSIONS TABLE												UNIT: mm												
NOMINAL SIZE		d	JIS 10K				D1	D2	L (LIFT)	L	t		H	H1	S	S1	S2	S3	S4	S5	S6	S7	S8	P
			D	C	n	h					PVC C-PVC	PP PVDF												
65mm	2½"	67	175	140	4	19	171	280	34	250	22	23	473	61	85	M8	15	—	—	—	—	—	—	¼
80	3	78	185	150	8	19	195	305	42	280	22	23	550	109	—	—	—	12	180	220	175	215	19	¼
100	4	100	210	175	8	19	235	385	50	340	22	24	601	119	—	—	—	15	230	270	220	260	19	¼



1. Operation of permission pressure: 0.4~0.6MPa G
2. Diaphragms except EPDM and PTFE are available in FKM, VIFLON-C (FKM-C), VIFLON-F (FKM-F), CSM and NBR when required.
3. The shape and appearance of assembly differ a little with nominal size compared to this drawing.




In case material of diaphragm is PTFE.



In case material of diaphragm is PTFE with cushion cover.

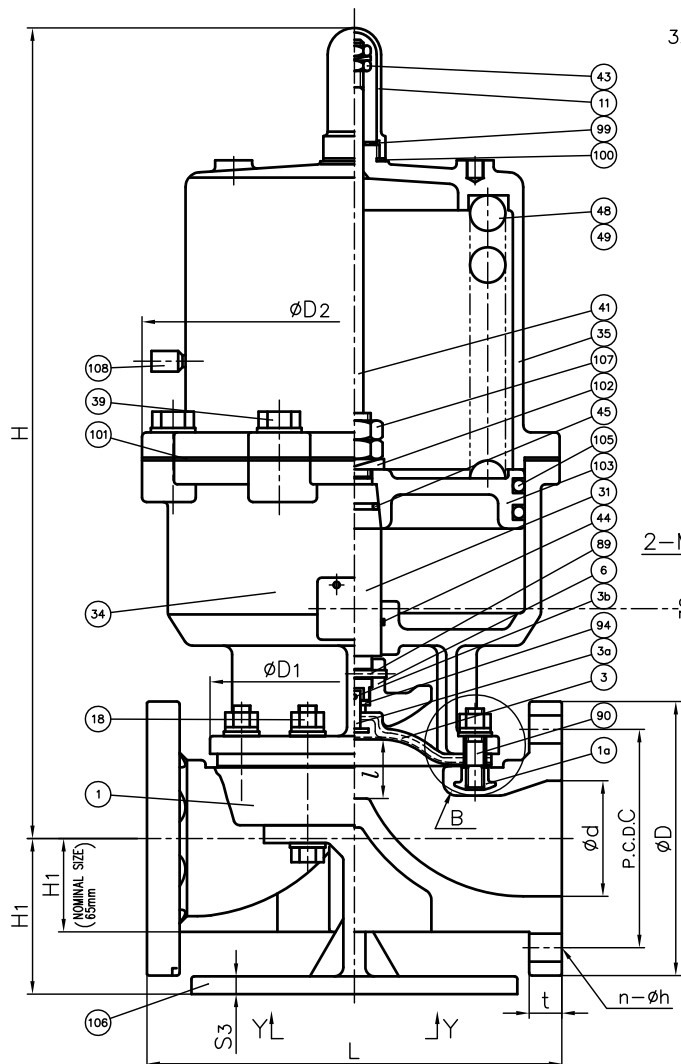


In Case of PVDF Body




“B” Part

Y-Y
(80,100^{mm})

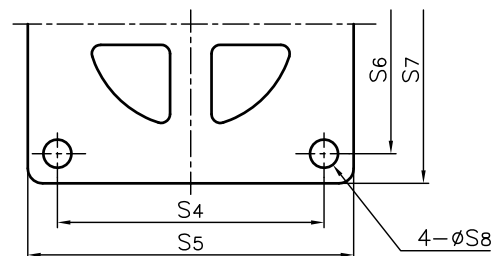

(65^{mm})



108	CHECK VALVE FOR EXHAUST	1	COPPER ALLOY (C3604)	
107	LOCK NUT	2	Chromized STEEL (SS400)	
106	STAND	1	CAST ALUMINUM ALLOY (AC4C) (Epoxy Coat)	Used for Size 80,100mm
105	O-RING (H)	2	NBR	
103	PISTON	1	CAST ALUMINUM ALLOY (AC2A)	
102	SPRING WASHER (A)	1	SPRING STEEL (SUP)	
101	SHEET GASKET (B)	1	NBR	
100	SHEET GASKET (A)	1	EPDM	
99	VALVE SHEET	1	STAINLESS STEEL (SUS304)	
94	METAL OF COMPRESSOR	1	STAINLESS STEEL (SUS304)	
90	STUD BOLT・NUT	4Sets	STAINLESS STEEL (SUS304)	
89	COMPRESSOR PIN	1	STAINLESS STEEL (SUS304)	
49	SPRING (B)	1	SPRING STEEL (SUP)	Used for Size 100mm
48	SPRING (A)	1	SPRING STEEL (SUP)	
45	O-RING (E)	1	NBR	
44	O-RING (D)	1	NBR	
43	STOPPER (B)	1	STAINLESS STEEL (SUS304)	
41	INDICATING LOD	1	STAINLESS STEEL (SUS304)	
39	BOLT (A)	—	STAINLESS STEEL (SUS304)	
35	CYLINDER BONNET	1	CAST ALUMINUM ALLOY (AC4C)	Epoxy Coat
34	CYLINDER BODY	1	CAST ALUMINUM ALLOY (AC4C)	Epoxy Coat
31	STEM (A)	1	COPPER ALLOY (C3604)	
24	ENSAT FOR BODY	2	STAINLESS STEEL (SUS303)	Used for Size 65mm
19	CONICAL SPRING WASHER (A)	8Sets	STAINLESS STEEL (SUS304)	Used for PVDF Body
18	BOLT・NUT (A)	4Sets	STAINLESS STEEL (SUS304)	
11	GAUGE COVER	1	PC	
6	COMPRESSOR	1	PVDF	
5	CUSHION COVER	1	□Nothing □PVDf	Used for PTFE Diaphragm
4	CUSHION	1	EPDM	
3b	DIAPHRAGM PIN	1	STAINLESS STEEL (SUS304)	
3a	INSERTED METAL OF DIAPHRAGM	1	STAINLESS STEEL (SUS304)	
3	DIAPHRAGM	1	□EPDM □PTFE □Others ()	
1a	INSERTED NUT	4	COPPER ALLOY (C3604)	Used for PVC,C-PVC,PP Body
			STAINLESS STEEL (SUS304)	Used for PVDF Body
1	BODY	1	□PVC □C-PVC □PP □PVDF	

No.	DESCRIPTION	QTY.	MATERIAL	REMARKS
ITEM	DIAPHRAGM VALVE (TYPE 14) PNEUMATIC ACTUATED MODEL TYPE AV ASSY AIR TO OPEN JIS 10K : FLANGED END 65 ^{mm} (2½") ~ 100 ^{mm} (4")			
DRAWN	M.Iwakiri	DATE	SCALE	
CHECKED	Y.Sato	NOV.1.2024	〰	
APPROVED	K.Yoshino	DRAWING No.		⚠
SPECIAL ORDER No.		D1-AA204JE		
ASAHI YUKIZAI CORPORATION				