
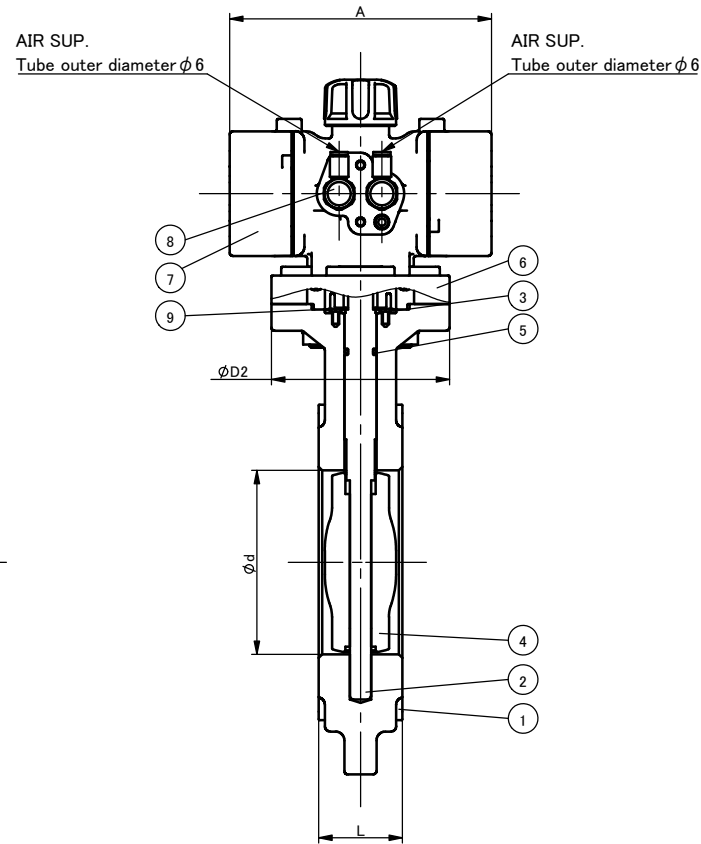


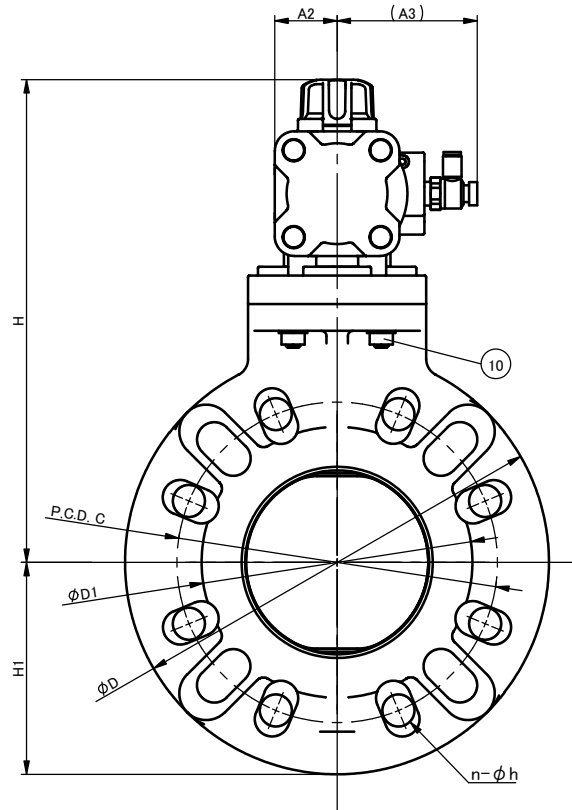

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	DIN PN10			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
40mm	1 1/2"	46	110	4	18	32	150	86	100	221	75	147	35.0	79	AR050DA14NN
50	2	57	125	4	18	35	165	96	100	231	83	147	35.0	79	AR050DA14NN
65	2 1/2	70	145	4	18	37	185	116	100	241	93	147	35.0	79	AR050DA14NN
80	3	78	160	8	18	37	211	120	100	256	106	147	35.0	79	AR050DA14NN
100	4	103	180	8	18	47	238	152	100	271	119	147	35.0	79	AR050DA14NN
125	5	129	210	8	18	57	255	190	140	308	128	188	42.5	87	AR063DA17SN
150	6	150	240	8	22	62	285	208	140	323	143	188	42.5	87	AR063DA17SN
200	8	195	295	8	22	76	350	264	140	412	175	355	82.0	111	AR100DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part (a) Exhaust, Part (b) Supply
Valve shut: Part (a) Supply, Part (b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

10	BOLT·NUT	4	SUS304 (STAINLESS STEEL)	
9	SCREW	4	SUS304 (STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303 (STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	PPG	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY			
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — DIN PN10 40mm (11/2") ~ 200mm (8") — OPTION:			
	DRAWN	N. Ito	DATE	SCALE
			Oct. 15, 2024	
CHECKED	Y. Sato	DRAWING No.		
APPROVED	K. Yoshino	DP-AA060DE		
SPECIAL ORDER No.				
ASAHI YUKIZAI CORPORATION				