
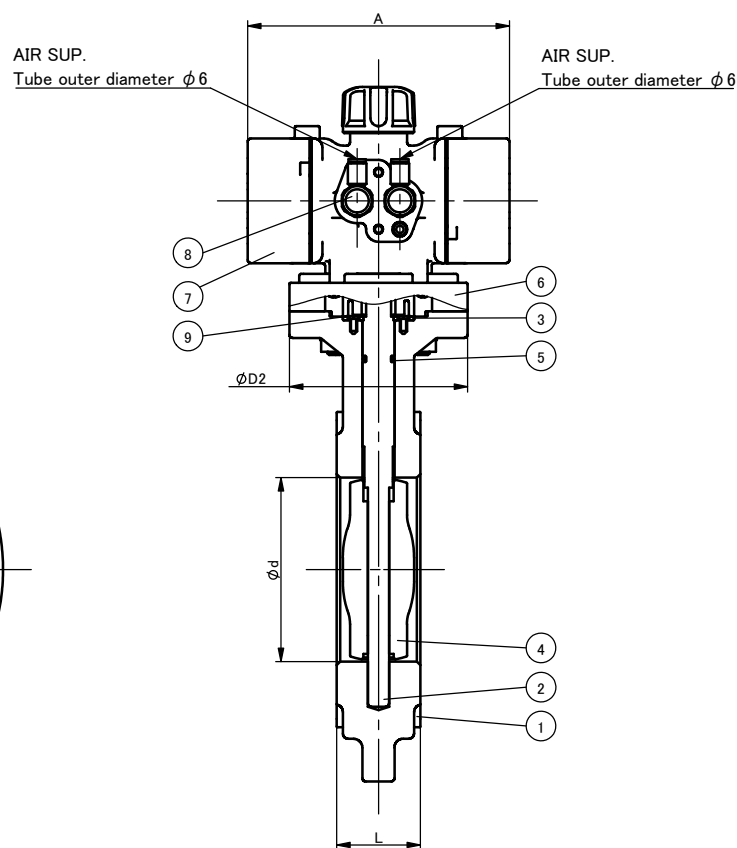


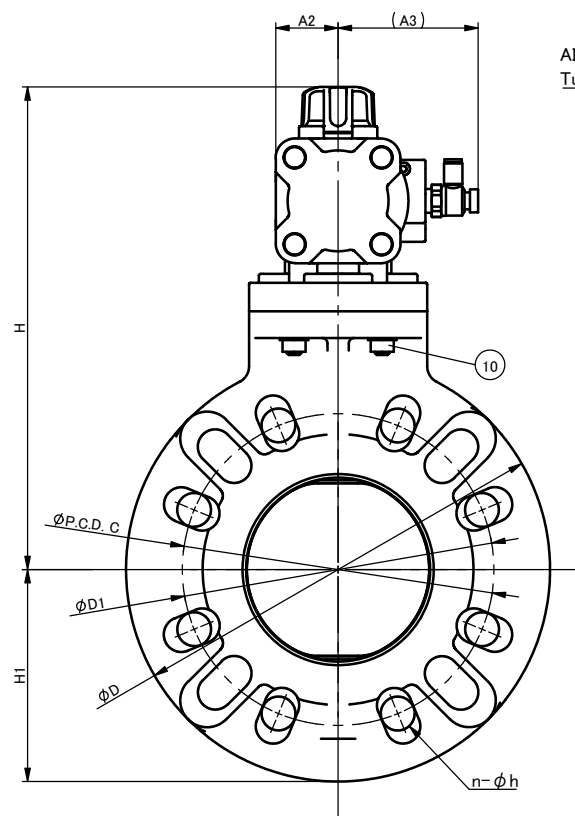

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	JIS 5K			JIS 10K			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h	C	n	h										
40mm	1 1/2"	46	95	4	15	105	4	19	32	150	86	100	221	75	147	35.0	79	AR050DA14NN
50	2	57	105	4	15	120	4	19	35	165	96	100	231	83	147	35.0	79	AR050DA14NN
65	2 1/2	70	130	4	15	140	4	19	37	185	116	100	241	93	147	35.0	79	AR050DA14NN
80	3	78	145	4	19	150	8	19	37	211	120	100	256	106	147	35.0	79	AR050DA14NN
100	4	103	165	8	19	175	8	19	47	238	152	100	271	119	147	35.0	79	AR050DA14NN
125	5	129	200	8	19	210	8	23	57	255	190	140	308	128	188	42.5	87	AR063DA17SN
150	6	150	230	8	19	240	8	23	62	285	208	140	323	143	188	42.5	87	AR063DA17SN
200	8	195	280	8	23	290	12	23	76	350	264	140	412	175	355	82.0	111	AR100DA22XN

10	BOLT·NUT	4	SUS304 (STAINLESS STEEL)	
9	SCREW	4	SUS304 (STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303 (STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	PPG	
5	O-RING	1	□EPDM □FKM □Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	□PVC □PP	
1	BODY			
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y		
	DOUBLE ACTING		
	□JIS 5K, □JIS10K 40mm (11/2") ~ 200mm (8")		
OPTION:			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA060JE	
ASAHI YUKIZAI CORPORATION			