
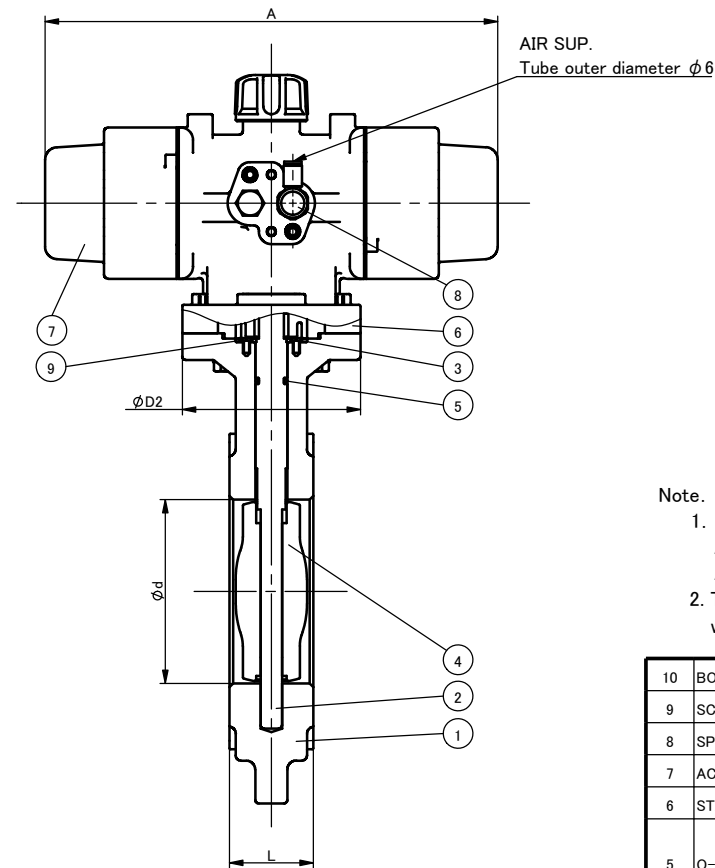


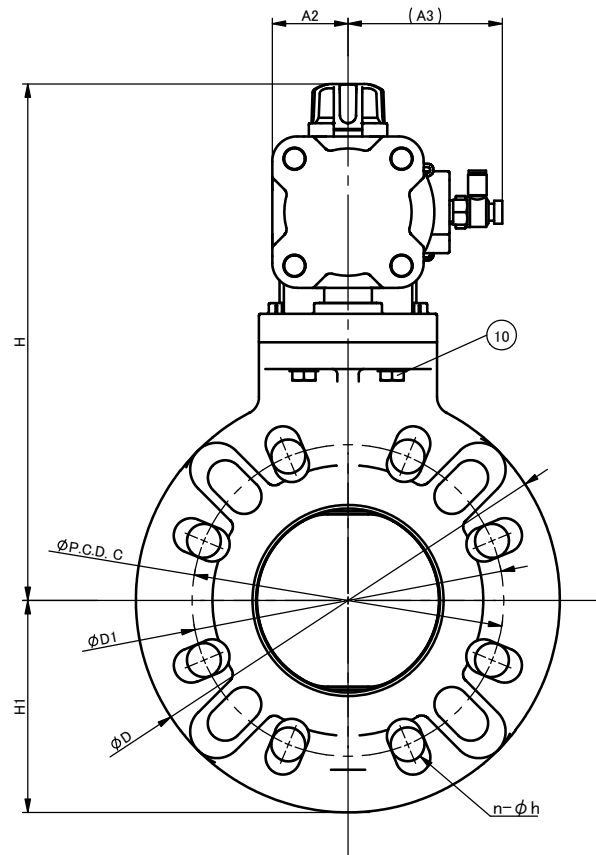

Note.

1. Operating pressure 0.4~0.7MPa G

Air to open :Air-less shut

Air to shut :Air-less open

2. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	JIS 5K			JIS 10K			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h	C	n	h										AIR TO OPEN	AIR TO SHUT
40mm	11/2"	46	95	4	15	105	4	19	32	150	86	100	221	75	194	35.0	79	AR050NC14NN	AR050NO14NN
50	2	57	105	4	15	120	4	19	35	165	96	100	231	83	194	35.0	79	AR050NC14NN	AR050NO14NN
65	21/2	70	130	4	15	140	4	19	37	185	116	100	241	93	194	35.0	79	AR050NC14NN	AR050NO14NN
80	3	78	145	4	19	150	8	19	37	211	120	100	275	106	254	42.5	87	AR063NC17SN	AR063NO17SN
100	4	103	165	8	19	175	8	19	47	238	152	100	290	119	254	42.5	87	AR063NC17SN	AR063NO17SN
125	5	129	200	8	19	210	8	23	57	255	190	140	326	128	438	58.5	89	AR070NC17SN	AR070NO17SN
150	6	150	230	8	19	240	8	23	62	285	208	140	341	143	438	58.5	89	AR070NC17SN	AR070NO17SN
200	8	195	280	8	23	290	12	23	76	350	264	140	412	175	569	82.0	111	AR100NC22XN	AR100NO22XN

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	PPG	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY			
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT — □JIS5K, □JIS 10K 40mm (1 1/2") ~200mm (8") — OPTION:			
	DRAWN	N. Ito	DATE	SCALE
	CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA061JE			
ASAHI YUKIZAI CORPORATION				