
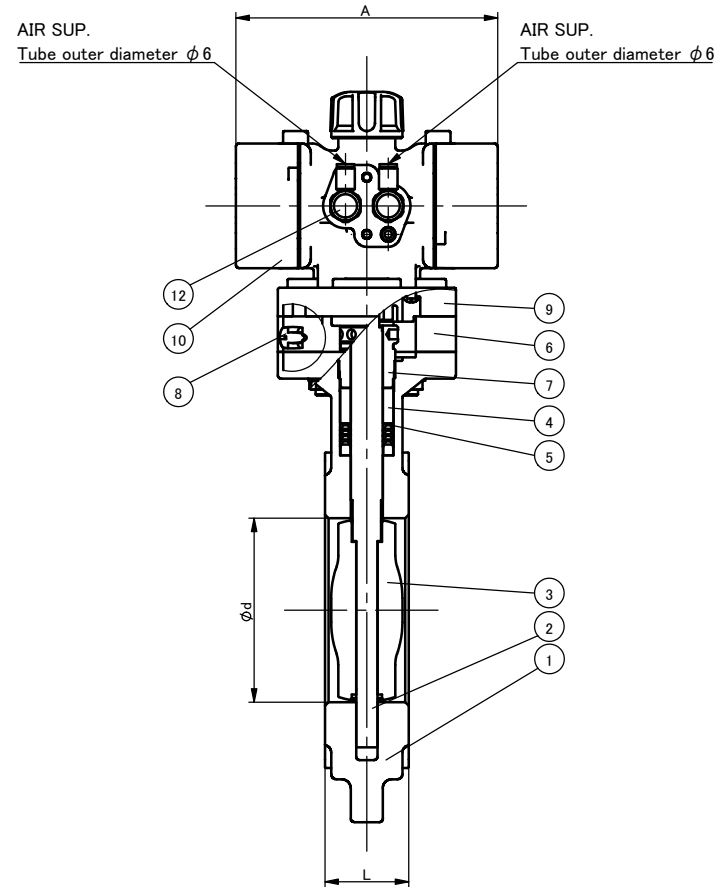


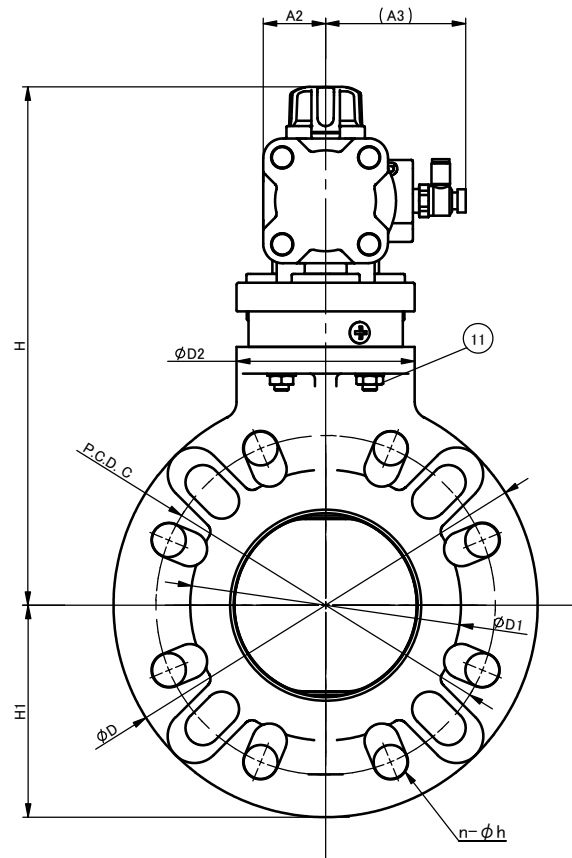

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
40mm	1 1/2"	46	98.5	4	16	32	150	86	100	241	75	147	35.0	79	AR050DA14NN
50	2	57	120.5	4	19	35	165	96	100	251	83	147	35.0	79	AR050DA14NN
65	2 1/2	70	139.5	4	19	37	185	116	100	261	93	147	35.0	79	AR050DA14NN
80	3	78	152.5	4	19	37	211	120	100	276	106	147	35.0	79	AR050DA14NN
100	4	103	190.5	8	19	47	238	152	100	291	119	147	35.0	79	AR050DA14NN
125	5	129	216.0	8	22	57	255	190	140	328	128	188	42.5	87	AR063DA17SN
150	6	150	241.5	8	22	62	285	208	140	343	143	188	42.5	87	AR063DA17SN
200	8	195	298.5	8	22	76	350	264	140	432	175	355	82.0	111	AR100DA22XN
250	10	251	362.0	12	25	96	409	322	180	489	205	355	82.0	111	AR100DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT·NUT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	PPG	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE	
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y		
	DOUBLE ACTING		
	ANSI Class 150 40mm(1 1/2")~250mm(10")		
OPTION:			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA062AE	
ASAHI YUKIZAI CORPORATION			