
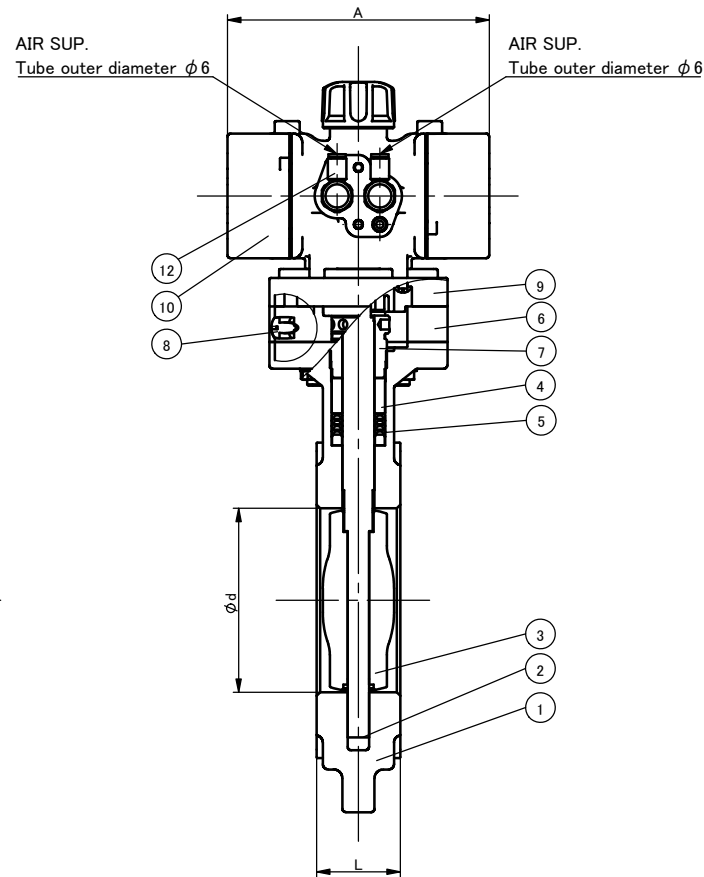


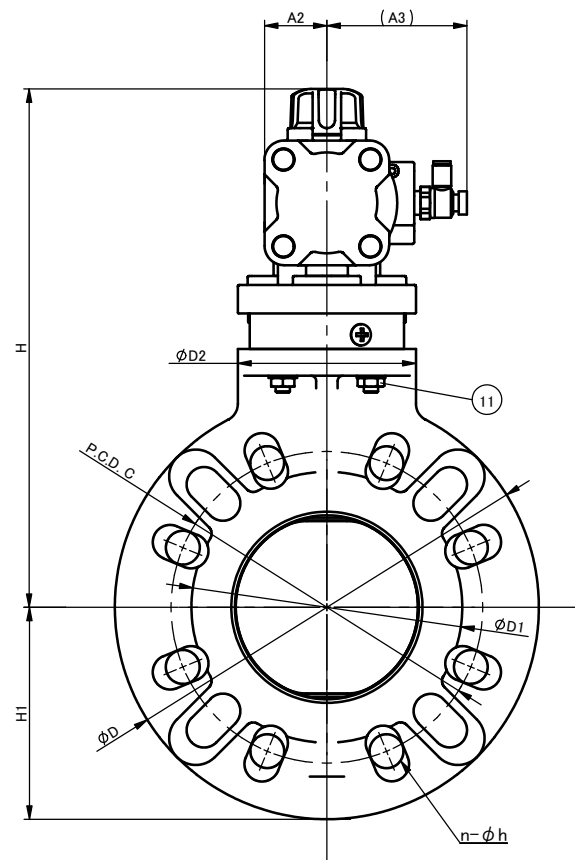

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	JIS 5K			JIS 10K			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h	C	n	h										
40mm	11/2"	46	95	4	15	105	4	19	32	150	86	100	241	75	147	35.0	79	AR050DA14NN
50	2	57	105	4	15	120	4	19	35	165	96	100	251	83	147	35.0	79	AR050DA14NN
65	2 1/2	70	130	4	15	140	4	19	37	185	116	100	261	93	147	35.0	79	AR050DA14NN
80	3	78	145	4	19	150	8	19	37	211	120	100	276	106	147	35.0	79	AR050DA14NN
100	4	103	165	8	19	175	8	19	47	238	152	100	291	119	147	35.0	79	AR050DA14NN
125	5	129	200	8	19	210	8	23	57	255	190	140	328	128	188	42.5	87	AR063DA17SN
150	6	150	230	8	19	240	8	23	62	285	208	140	343	143	188	42.5	87	AR063DA17SN
200	8	195	280	8	23	290	12	23	76	350	264	140	432	175	355	82.0	111	AR100DA22XN
250	10	251	345	12	23	355	12	25	96	409	322	180	489	205	355	82.0	111	AR100DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part (a) Exhaust, Part (b) Supply
Valve shut: Part (a) Supply, Part (b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303 (STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT·NUT	4	SUS304 (STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	PPG	
8	SCREW	1	SUS304 (STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE	
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y		
	DOUBLE ACTING		
DRAWN	N. Ito	DATE	
		Oct. 15, 2024	
CHECKED	Y. Sato	DRAWING No.	
APPROVED	K. Yoshino	DP-AA062JE	
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION	