
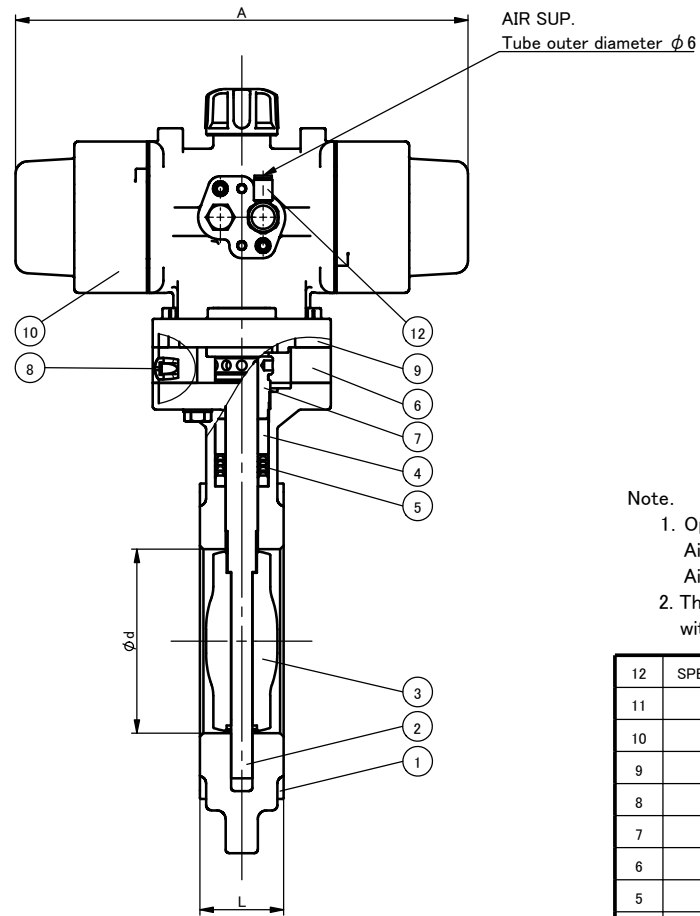


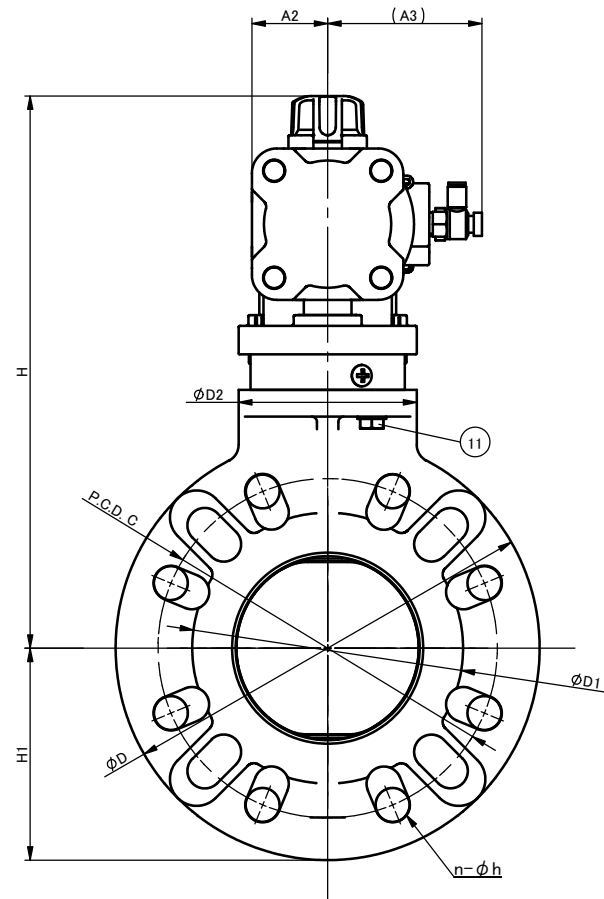

Note.

- Operating pressure 0.4–0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h										AIR TO OPEN	AIR TO SHUT
40mm	11/2"	46	98.5	4	16	32	150	86	100	241	75	194	35.0	79	AR050NC14NN	AR050NO14NN
50	2	57	120.5	4	19	35	165	96	100	251	83	194	35.0	79	AR050NC14NN	AR050NO14NN
65	21/2	70	139.5	4	19	37	185	116	100	261	93	194	35.0	79	AR050NC14NN	AR050NO14NN
80	3	78	152.5	4	19	37	211	120	100	295	106	254	42.5	87	AR063NC17SN	AR063NO17SN
100	4	103	190.5	8	19	47	238	152	100	310	119	254	42.5	87	AR063NC17SN	AR063NO17SN
125	5	129	216.0	8	22	57	255	190	140	346	128	438	58.5	89	AR070NC17SN	AR070NO17SN
150	6	150	241.5	8	22	62	285	208	140	361	143	438	58.5	89	AR070NC17SN	AR070NO17SN
200	8	195	298.5	8	22	76	350	264	140	432	175	569	82.0	111	AR100NC22XN	AR100NO22XN
250	10	251	362.0	12	25	96	409	322	180	489	205	569	82.0	111	AR100NC22XN	AR100NO22XN

12	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	PPG	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE	
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y		
	□AIR TO OPEN, □AIR TO SHUT		
	ANSI Class 150		
	40mm (1 1/2")~250mm (10")		
OPTION: _____			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA063AE _m	
ASAHI YUKIZAI CORPORATION			