
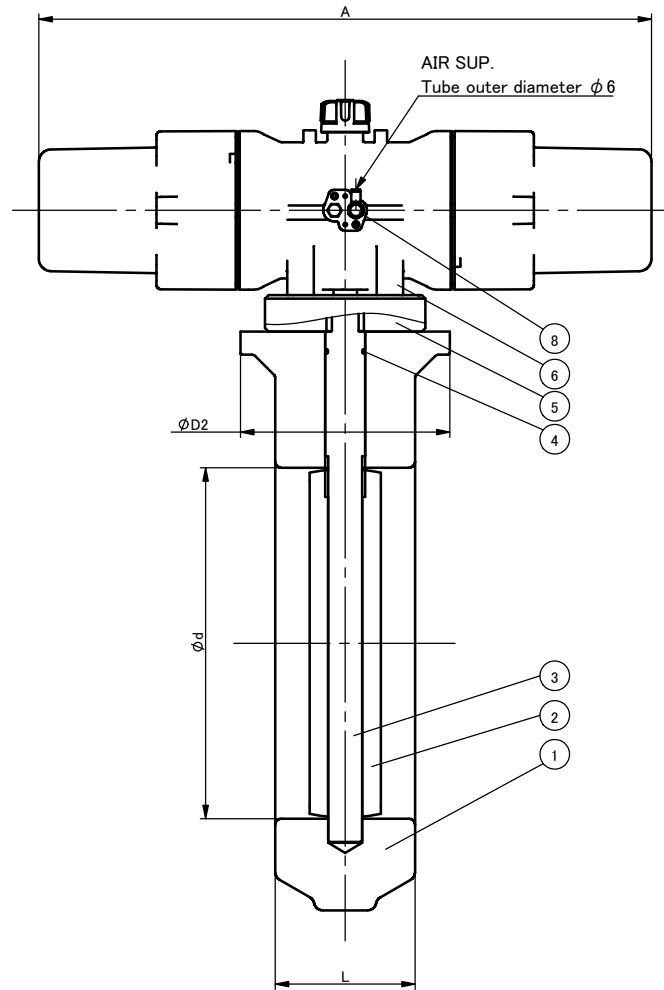


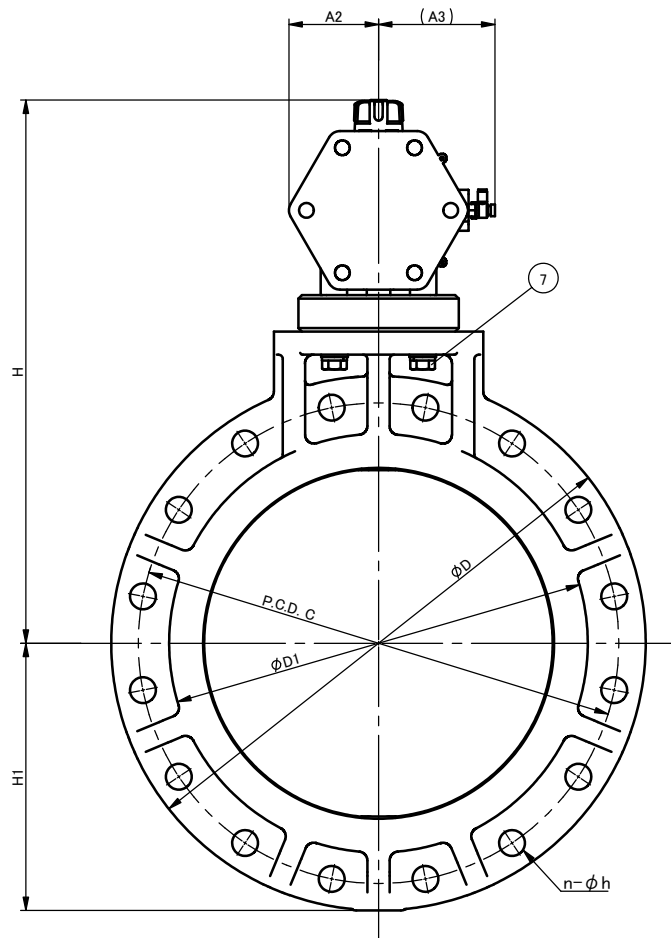

DIMENSIONS TABLE

UNIT : inch

NOMINAL SIZE		ANSI Class 150				ACTUATOR TYPE									
		d	C	n	h	L	D	D1	D2	H	H1	A	A2	A3	
16"	400mm	15.51	21.25	16	1.12	6.18	23.62	18.50	9.25	24.02	11.81	27.09	3.98	5.16	

Note.

1. Operating pressure 0.4~0.7MPa G

Air to open :Air-less shut

Air to shut :Air-less open

2. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	BOLT	4	SUS304(STAINLESS STEEL)	
6	ACTUATOR	1	PPG etc.	
5	STAND	1	ABS	
4	O-RING	1	□EPDM □FKM □Others ()	
3	STEM	1	PP	
2	DISC	1	PP	
1	BODY	1	PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT — ANSI Class 150 16" (400mm) — OPTION:			
	DRAWN	N. Ito	DATE	SCALE
	CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA064AE			
ASAHI YUKIZAI CORPORATION				