
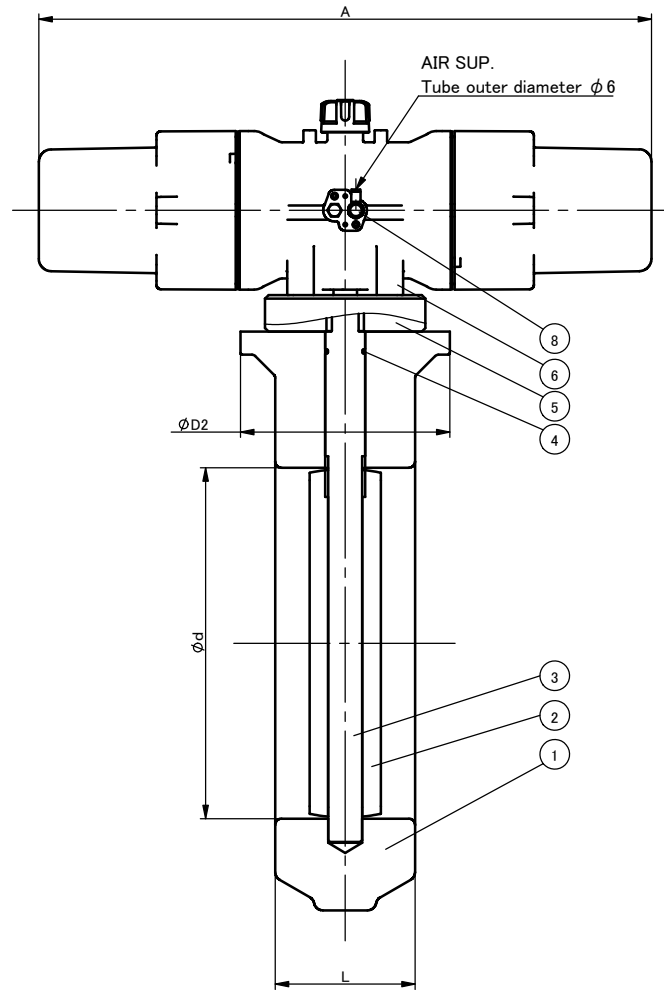


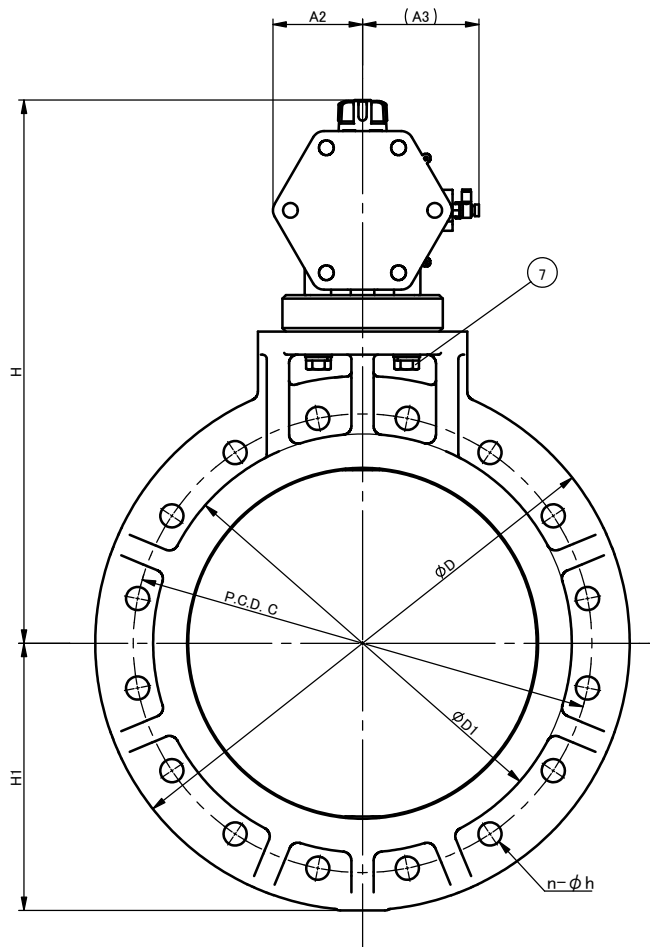

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	DIN PN10			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h										AIR TO OPEN	AIR TO SHUT
400mm	16"	394	515	16	26	157	600	470	235	610	300	688	101	131	AR125NC22XN	AR125NO22XN

Note.

1. Operating pressure 0.4-0.7MPa G

Air to open :Air-less shut

Air to shut :Air-less open

2. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	BOLT	4	SUS304(STAINLESS STEEL)	
6	ACTUATOR	1	PPG etc.	
5	STAND	1	ABS	
4	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
3	STEM	1	PP	
2	DISC	1	PP	
1	BODY	1	PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y ☐ AIR TO OPEN, ☐ AIR TO SHUT DIN PN10 400mm (16") OPTION: —					
	DRAWN	N. Ito	<table><tr><td>DATE</td><td>SCALE</td></tr><tr><td>Oct. 15, 2024</td><td></td></tr></table>	DATE	SCALE	Oct. 15, 2024
DATE	SCALE					
Oct. 15, 2024						
CHECKED	Y. Sato	DRAWING No.				
APPROVED	K. Yoshino	DP-AA064DE				
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION					