
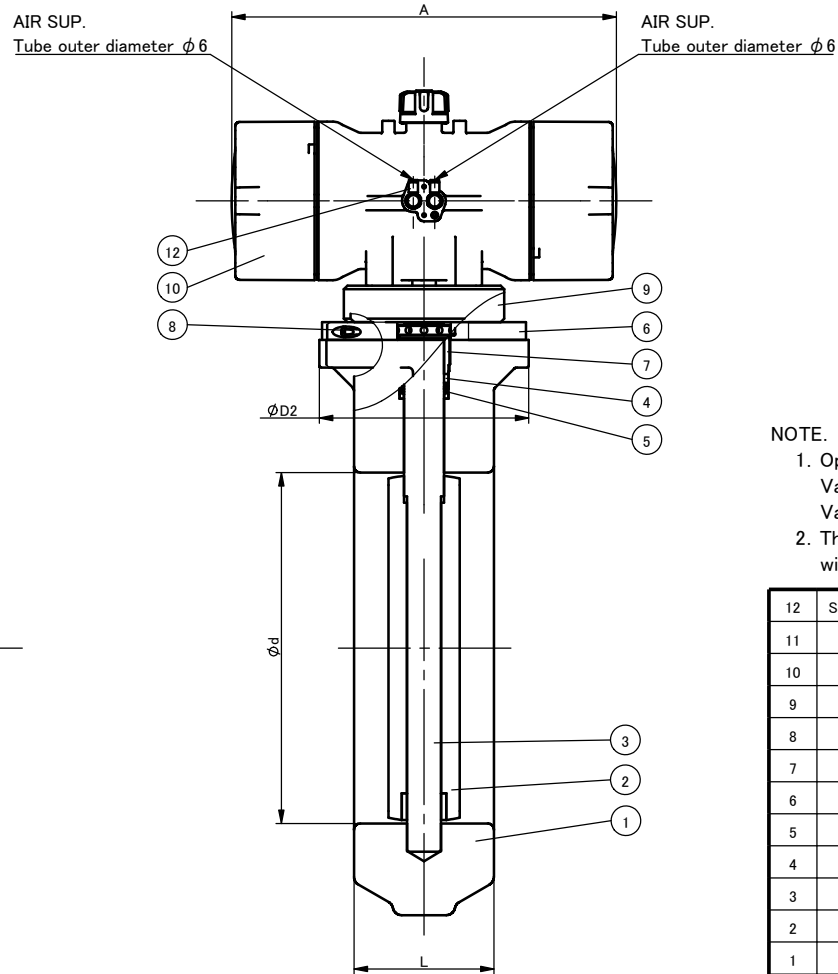


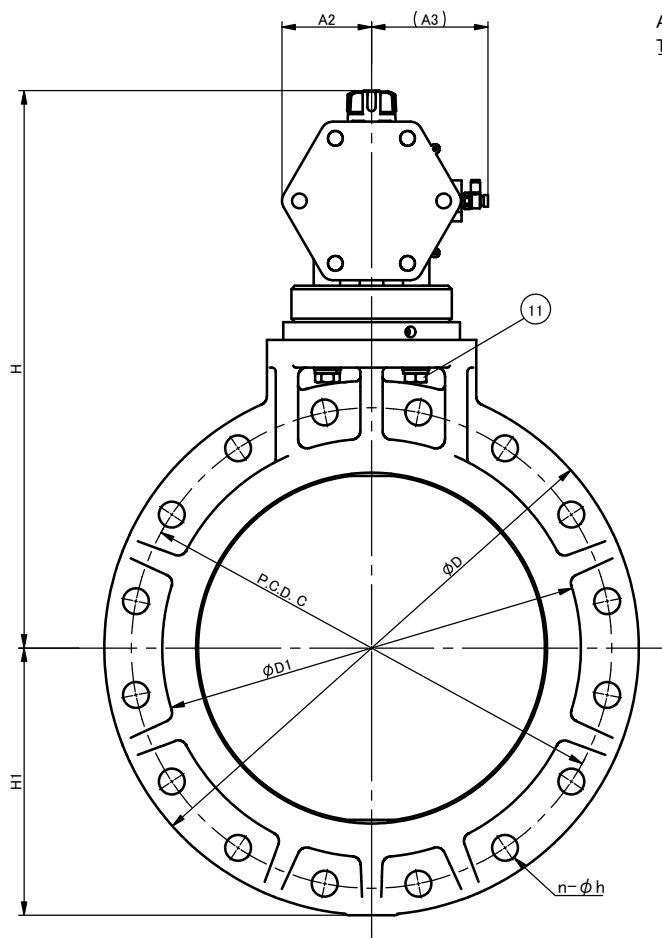

DIMENSIONS TABLE

UNIT: inch

NOMINAL SIZE	d	ANSI Class 150				L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
		C	n	h											
16"	400mm	15.51	21.25	16	1.12	6.18	23.62	18.50	9.25	24.65	11.81	17.01	3.98	5.16	AR125DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT·NUT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PVDF	
3	STEM	1	PVDF	
2	DISK	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING ANSI Class 150 16" (400mm) OPTION: —					
	DRAWN	N. Ito	<table><tr><td>DATE</td><td>SCALE</td></tr><tr><td>Oct. 15, 2024</td><td></td></tr></table>	DATE	SCALE	Oct. 15, 2024
DATE	SCALE					
Oct. 15, 2024						
CHECKED	Y. Sato	DRAWING No.				
APPROVED	K. Yoshino	DP-AA065AE				
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION					