
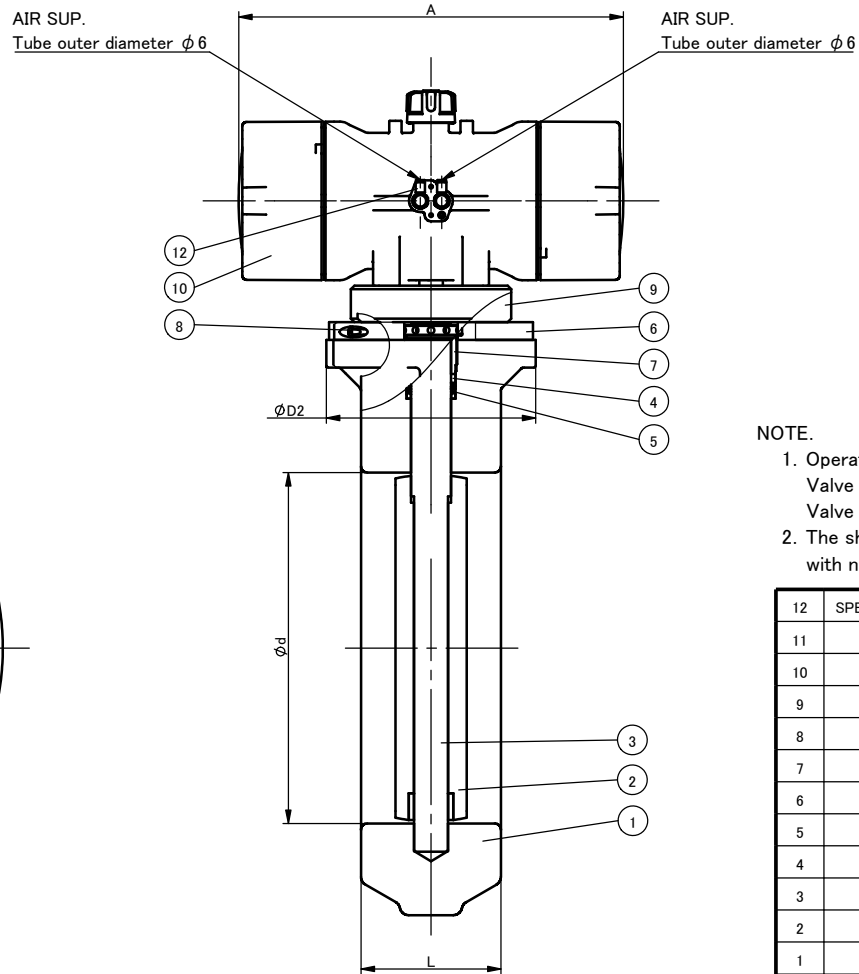


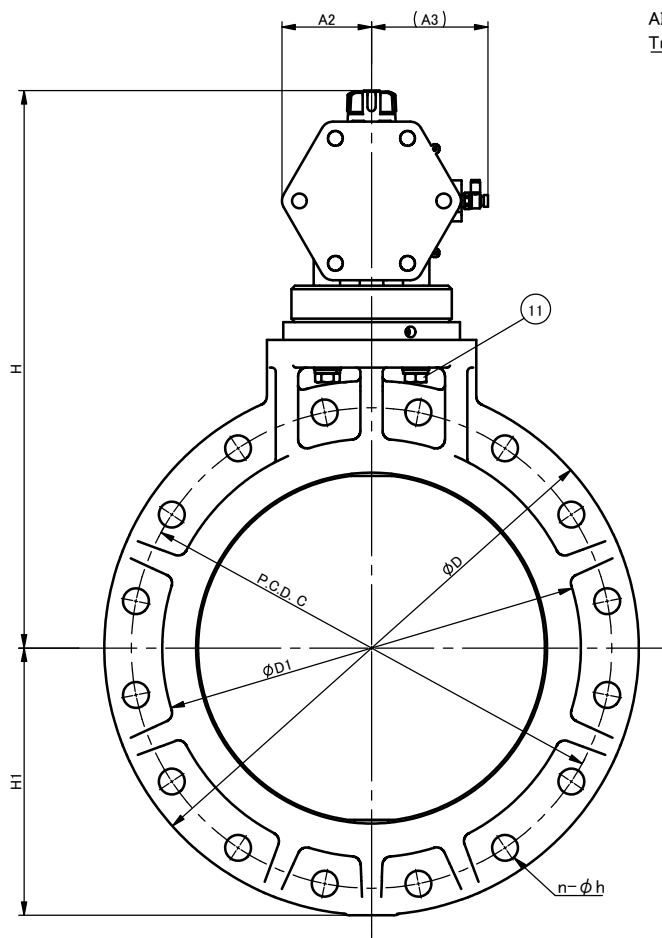

DIMENSIONS TABLE

NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
400mm	16"	394	539.5	16	29	157	600	470	235	626	300	432	101	131	AR125DA22XN

UNIT:mm

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open:Part(a) Exhaust, Part(b) Supply
Valve shut:Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT·NUT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PVDF	
3	STEM	1	PVDF	
2	DISK	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — ANSI Class 150 400mm (16")		
	OPTION: —		
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	~
APPROVED	K. Yoshino	DRAWING No. DP-AA065AE _m	
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION	