

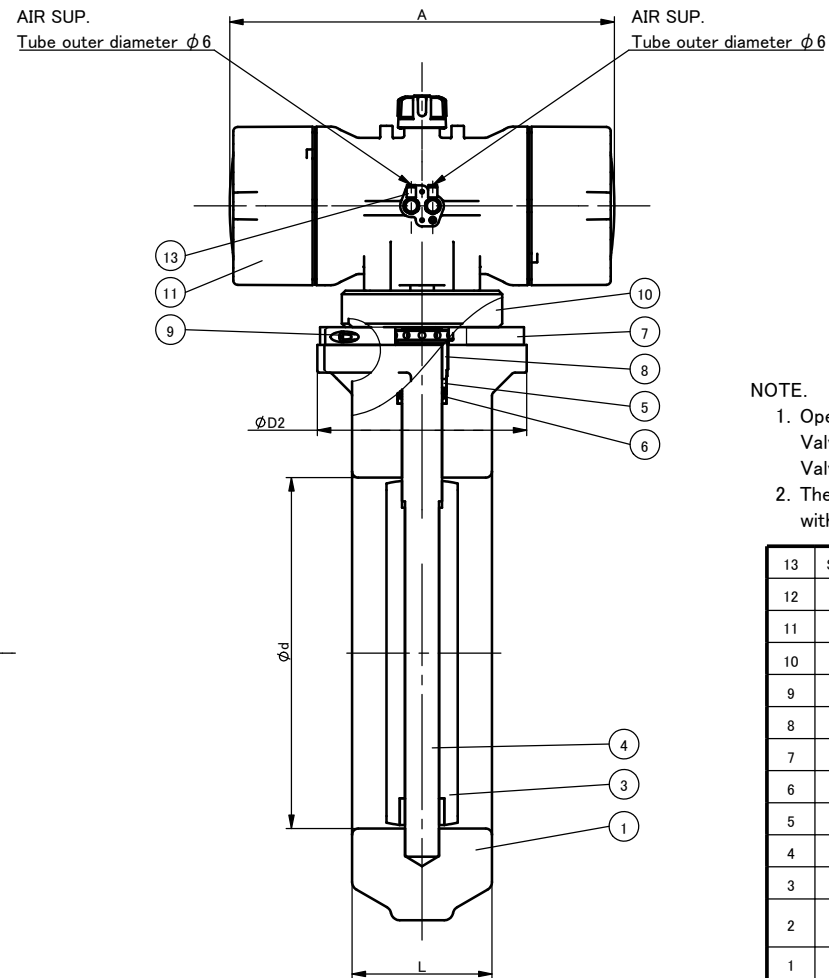


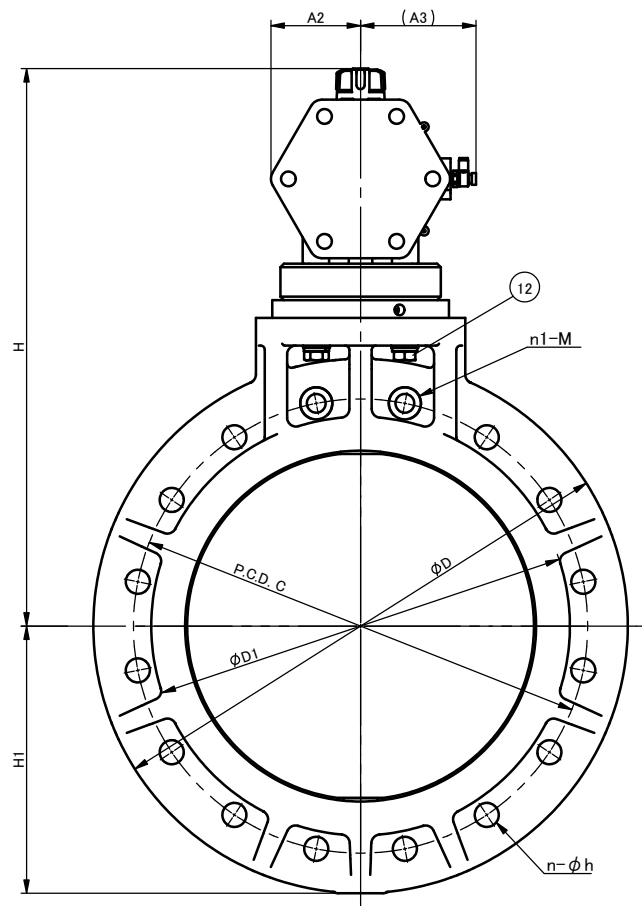

Detail of Inserted Nuts

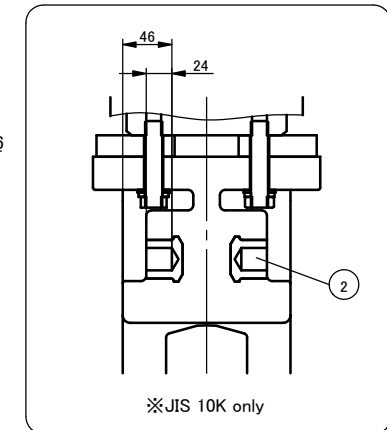

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part (a) Exhaust, Part (b) Supply
Valve shut: Part (a) Supply, Part (b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

13	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
12	BOLT·NUT	4	SUS304(STAINLESS STEEL)	
11	ACTUATOR	1	PPG etc.	
10	STAND	1	ABS	
9	SCREW	1	SUS304(STAINLESS STEEL)	
8	GLAND	1	PVDF	
7	SPACER	1	C-PVC	
6	V-PACKING	4	PTFE	
5	BUSH	1	PVDF	
4	STEM	1	PVDF	
3	DISK	1	PVDF	
2	INSERTED METAL OF BODY	4	C3604(COPPER ALLOY)	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

DIMENSIONAL TABLE														UNIT: mm									
NOMINAL SIZE		JIS 5K				JIS 10K						L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE		
		d	C	n	h	C	h	N Number of standard bolt holes	n Number of standard bolt holes	n1 (screw holes)												M	
										one side	total												
400mm	16"	394	495	16	25	510	27	16	14	2	4	M24	157	600	470	235	626	300	432	101	131	AR125DA22XN	

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — ☐ JIS5K, ☐ JIS10K 400mm(16")			
	OPTION: —			
DRAWN	N. Ito	DATE	SCALE	
CHECKED	Y. Sato	Oct. 15, 2024		
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA065JE			
ASAHI YUKIZAI CORPORATION				