
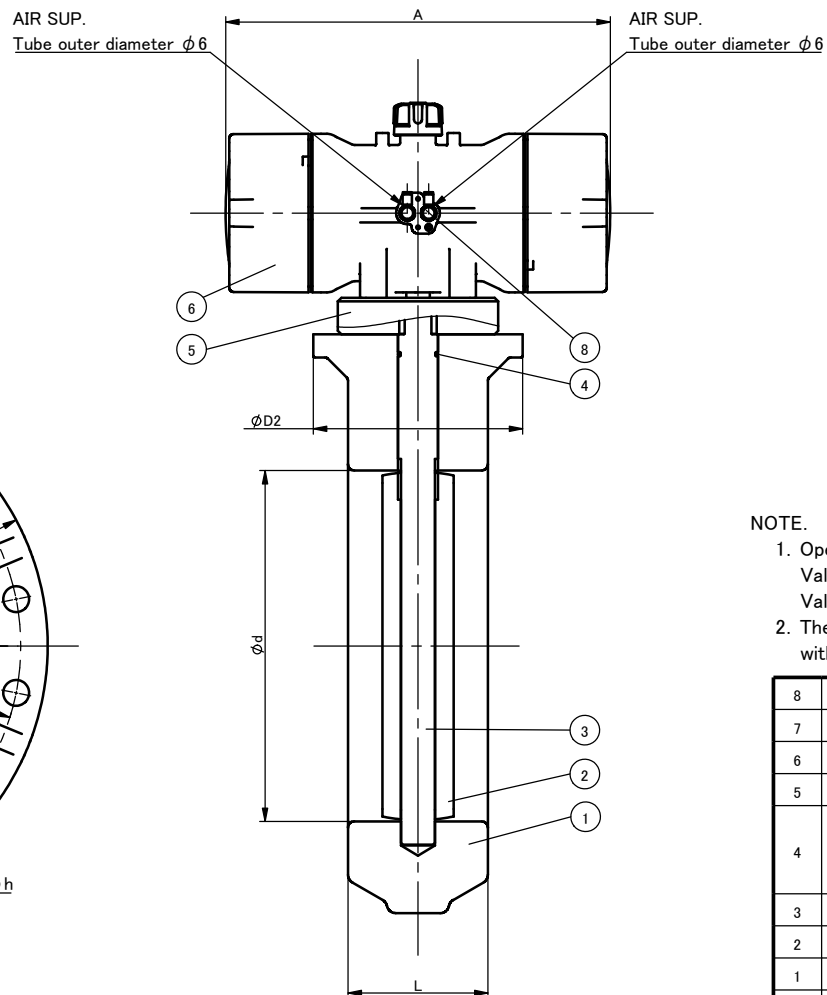


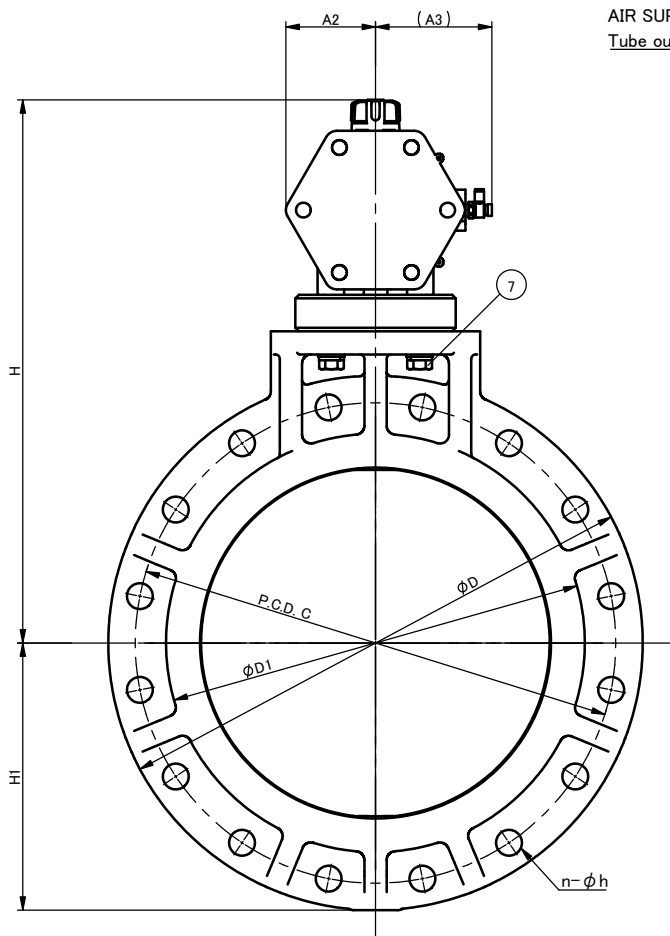

DIMENSIONS TABLE

UNIT: inch

DIMENSIONS TABLE											UNIT: INCH				
NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
16"	400mm	15.51	21.25	16	1.12	6.18	23.62	18.50	9.25	24.02	11.81	17.01	3.98	5.16	AR125DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

8	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	BOLT	4	SUS304(STAINLESS STEEL)	
6	ACTUATOR	1	PPG etc.	
5	STAND	1	ABS	
4	O-RING	1	□EPDM □FKM □Others ()	
3	STEM	1	PP	
2	DISC	1	PP	
1	BODY	1	PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y		
	DOUBLE ACTING		
	ANSI Class 150 16" (400mm)		
OPTION:			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA066AE	
ASAHI YUKIZAI CORPORATION			