

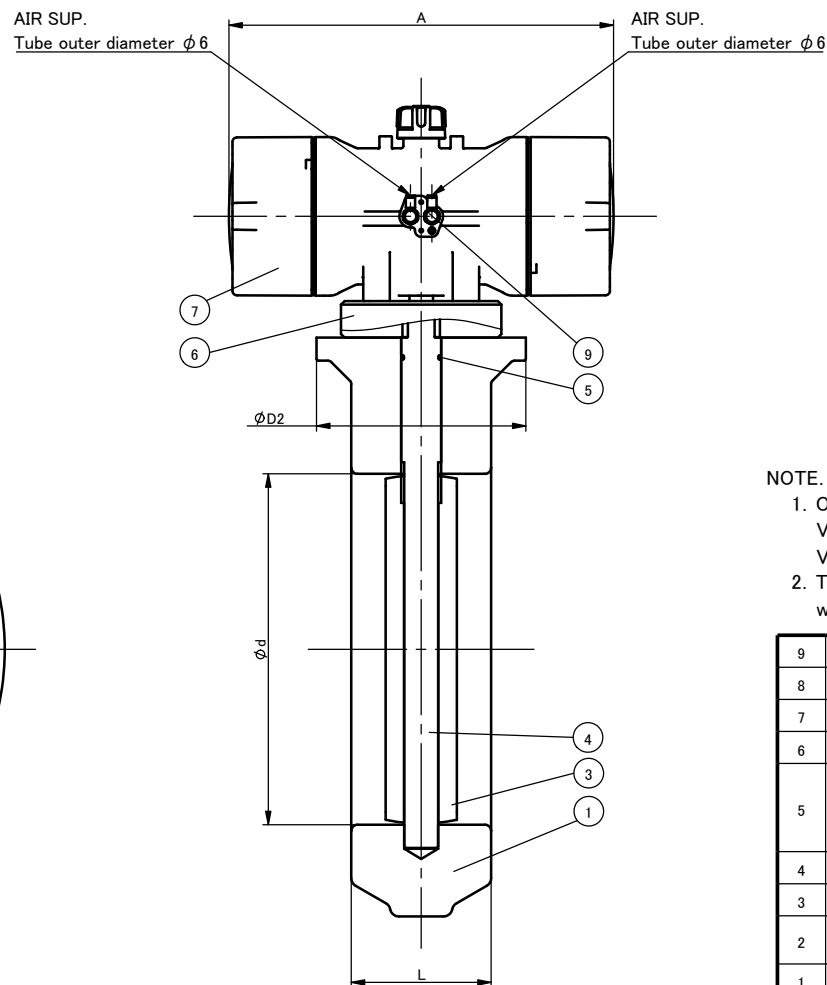


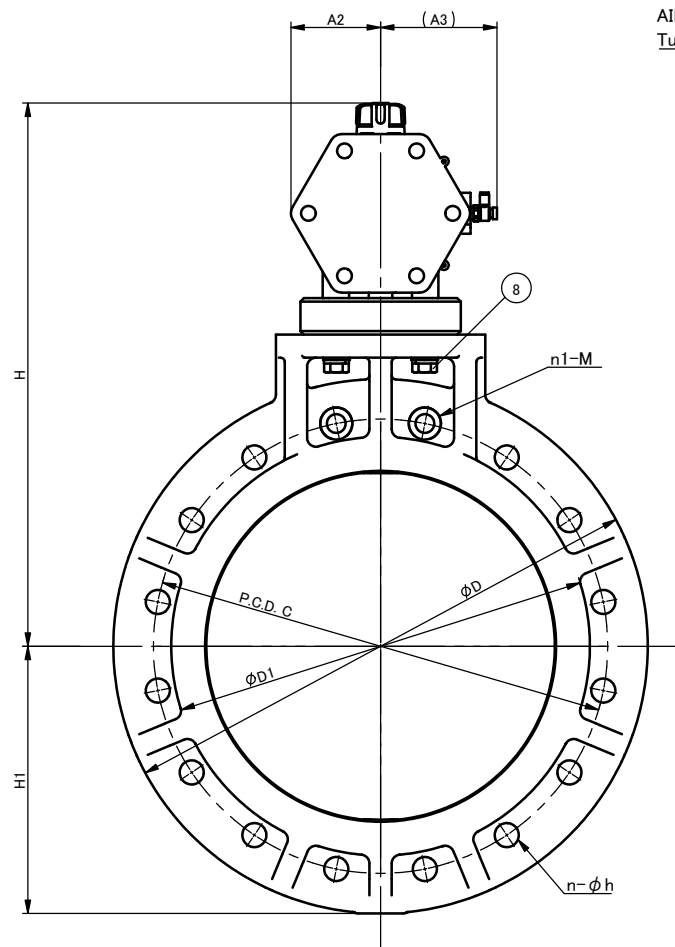

Detail of Inserted Nuts

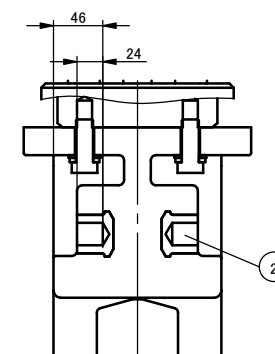

※JIS 10K only

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

9	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
8	BOLT	4	SUS304(STAINLESS STEEL)	
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	□EPDM □FKM □Others ()	
4	STEM	1	PP	
3	DISC	1	PP	
2	INSERTED METAL OF BODY	4	C3604(COPPER ALLOY)	
1	BODY	1	PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — □JIS 5K, □JIS 10K 400mm (16")		
	OPTION: —		
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	~
APPROVED	K. Yoshino	DRAWING No. DP-AA066JE	
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION	

DIMENSIONS TABLE

DIMENSION TABLE												UNIT: mm										
NOMINAL SIZE		JIS 5K				JIS 10K							L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
		d	C	n	h	C	h	N Number of standard bolt holes	n Number of standard bolt holes	n1 (screw holes)		M										
										one side	total											
400mm	16"	394	495	16	25	510	27	16	14	2	4	M24	157	600	470	235	610	300	432	101	131	AR125DA22XN