
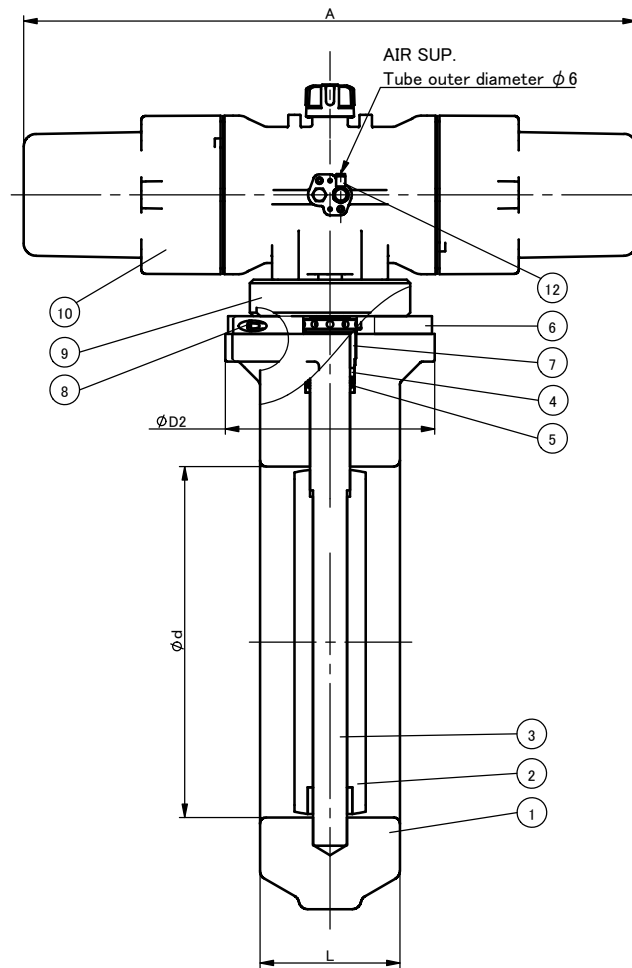


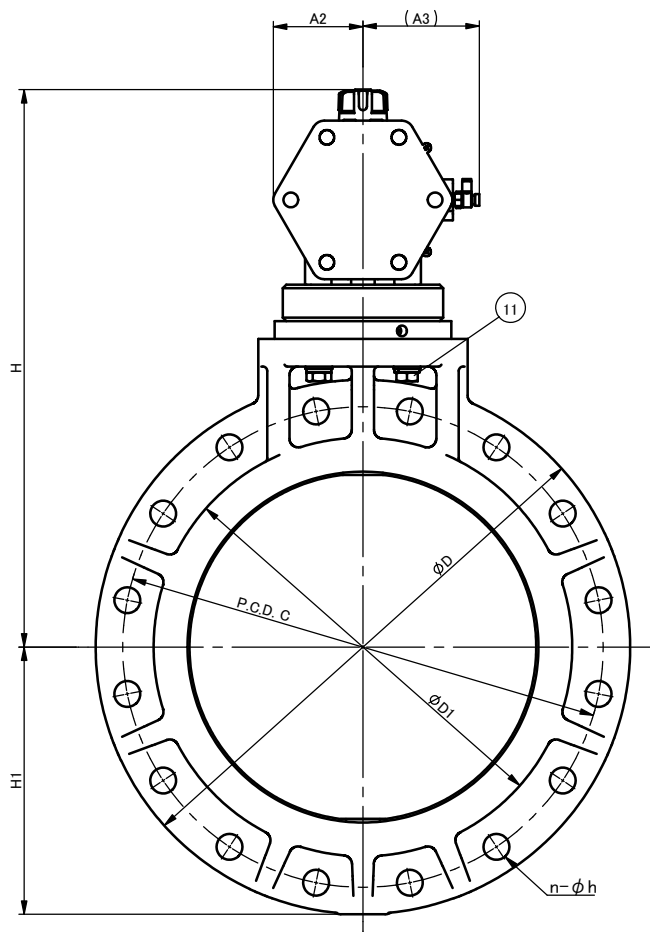

DIMENSIONS TABLE

UNIT : inch

NOMINAL SIZE		d	ANSI Class 150				ACTUATOR TYPE									
			C	n	h	L	D	D1	D2	H	H1	A	A2	A3	AIR TO OPEN	AIR TO SHUT
16"	400mm	15.51	21.25	16	1.12	6.18	23.62	18.50	9.25	24.65	11.81	27.09	3.98	5.16	AR125NC22XN	AR125NO22XN

Note.

1. Operating pressure 0.4~0.7MPa G

Air to open :Air-less shut

Air to shut :Air-less open

2. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

12	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT-NUT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PVDF	
3	STEM	1	PVDF	
2	DISK	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT		
	ANSI Class 150 16" (400mm)		
OPTION: —			
DRAWN	N. Ito	DATE	SCALE
CHECKED		Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
		DP-AA067AE	
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION		