
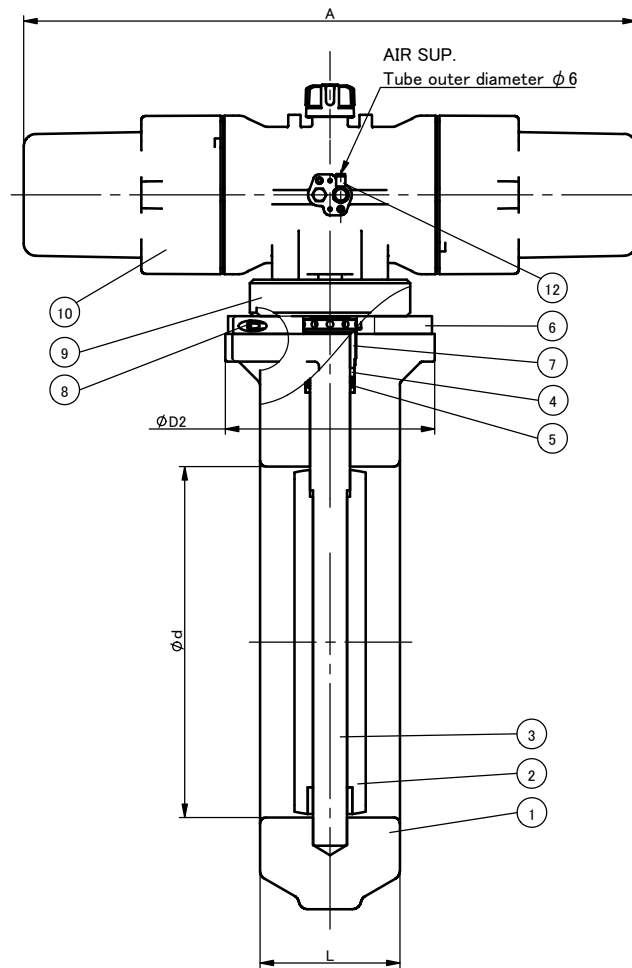


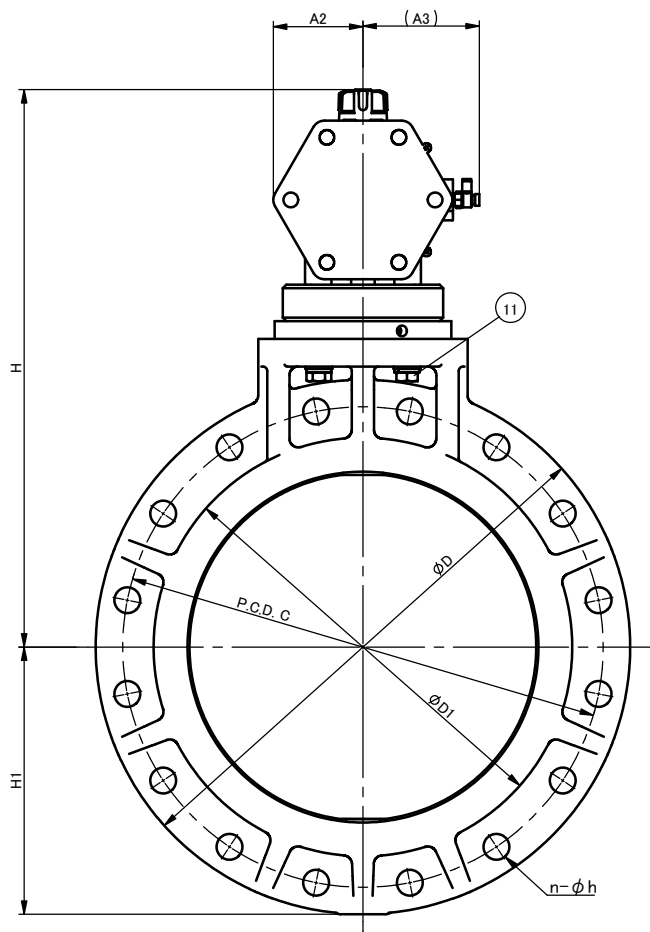

Note.

- Operating pressure 0.4–0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		ANSI Class 150				ACTUATOR TYPE									
		d	C	n	h	L	D	D1	D2	H	H1	A	A2	A3	
400mm	16"	394	539.5	16	29	157	600	470	235	626	300	688	101	131	

12	SPEED CONTROLLER	1	SUS303 (STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT-NUT	4	SUS304 (STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304 (STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PVDF	
3	STEM	1	PVDF	
2	DISK	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y		
	□AIR TO OPEN, □AIR TO SHUT		
		ANSI Class 150	
		400mm (16")	
		OPTION:	
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	~
APPROVED	K. Yoshino	DRAWING No.	
		DP-AA067AE _m	
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION	