

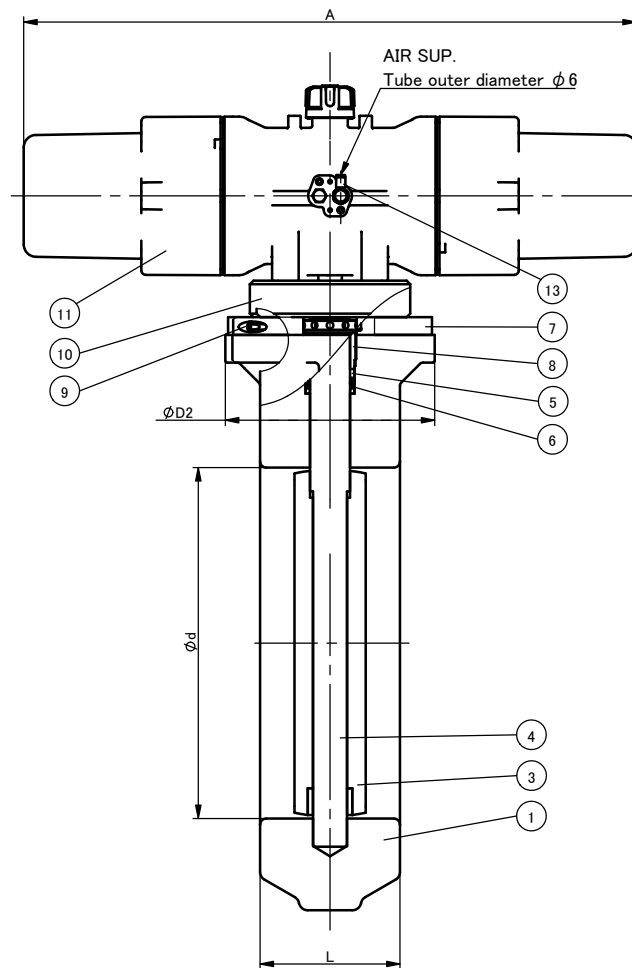


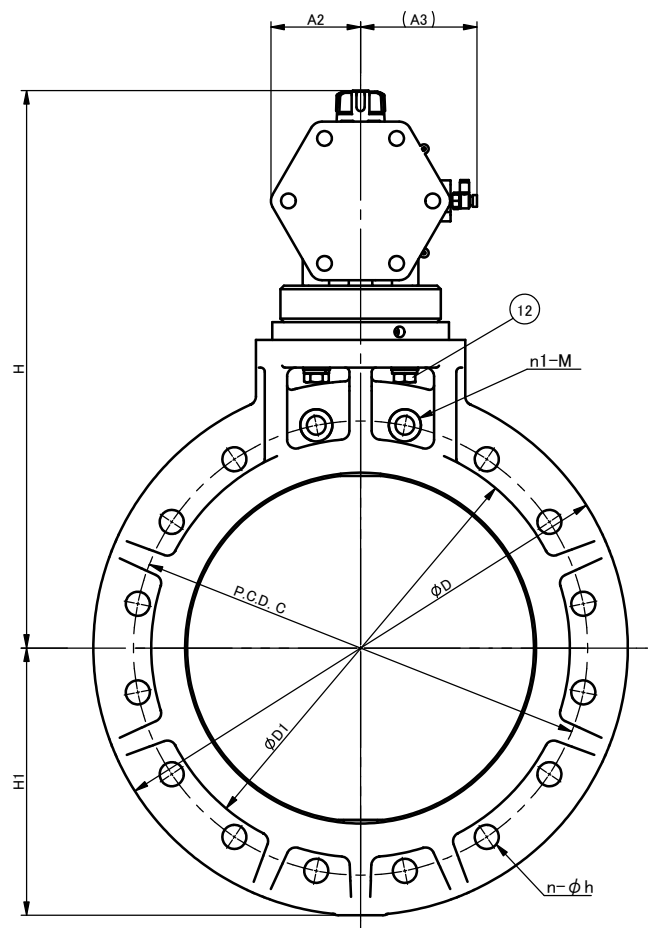

Detail of Inserted Nuts

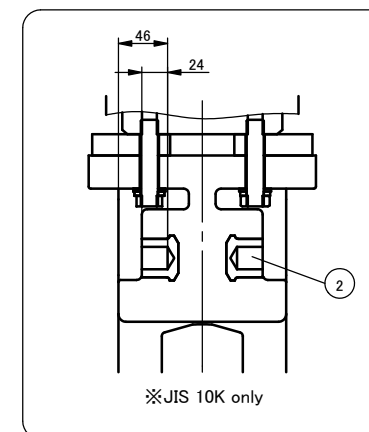

Note.

- Operating pressure 0.4–0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

13	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
12	BOLT·NUT	4	SUS304(STAINLESS STEEL)	
11	ACTUATOR	1	PPG etc.	
10	STAND	1	ABS	
9	SCREW	1	SUS304(STAINLESS STEEL)	
8	GLAND	1	PVDF	
7	SPACER	1	C-PVC	
6	V-PACKING	4	PTFE	
5	BUSH	1	PVDF	
4	STEM	1	PVDF	
3	DISK	1	PVDF	
2	INSERTED METAL OF BODY	4	C3604(COPPER ALLOY)	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

DIMENSION TABLE													UNIT : mm										ACTUATOR TYPE	
NOMINAL SIZE		JIS 5K				JIS 10K						L	D	D1	D2	H	H1	A	A2	A3				
		d	C	n	h	C	h	N Number of standard bolt holes	n Number of standard bolt holes	n1 (screw holes)											M			
400mm	16"	394	495	16	25	510	27	16	14	2	4	M24	157	600	470	235	626	300	688	101	131	AIR TO OPEN	AIR TO SHUT	

ITEM	ROTARY DAMPER TYPE 56 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT — □JIS5K, □JIS10K 400mm (16")			
	OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024		
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA067JE			
ASAHI YUKIZAI CORPORATION				