
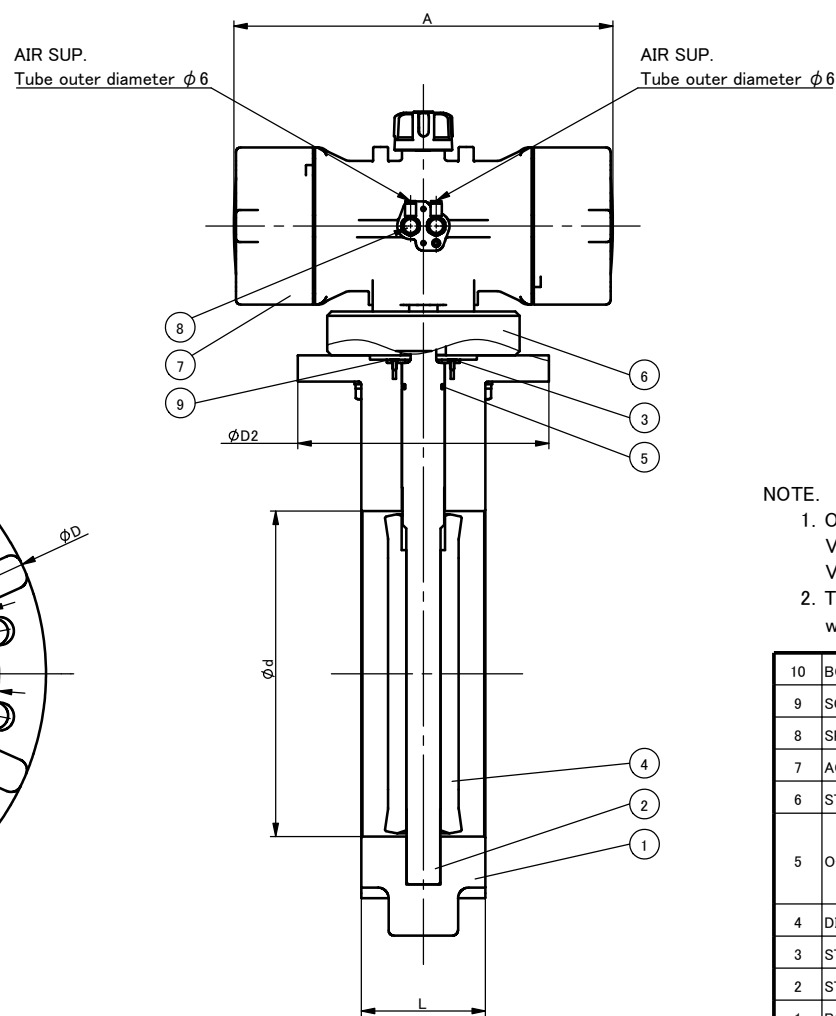


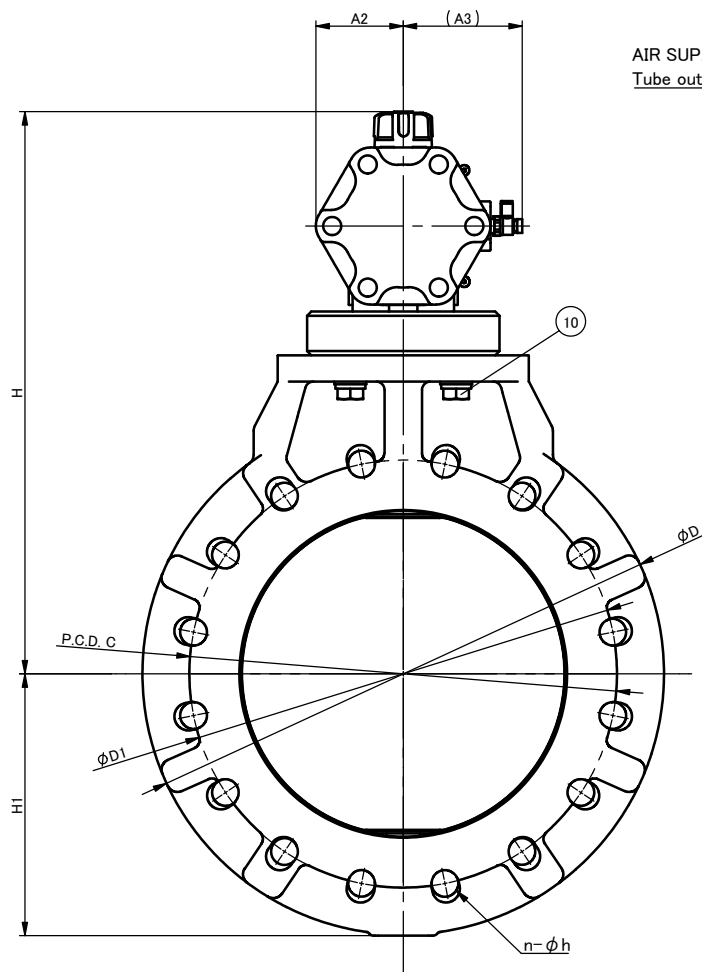

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	□EPDM □FKM □Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	□PVC □PP	
1	BODY	1	□PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT: inch

NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
10"	250mm	9.88	14.25	12	1.00	3.78	16.57	13.07	7.09	18.46	8.31	13.98	3.23	4.37	AR100DA22XN
12	300	11.93	17.00	12	1.00	4.57	19.21	15.75	9.25	20.71	9.61	13.98	3.23	4.37	AR100DA22XN
14	350	13.86	18.75	12	1.12	4.57	21.22	16.30	9.25	21.77	10.63	13.98	3.23	4.37	AR100DA22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — ANSI Class150 10" (250mm) ~14" (350mm) OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024		
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA071AE			
ASAHI YUKIZAI CORPORATION				