
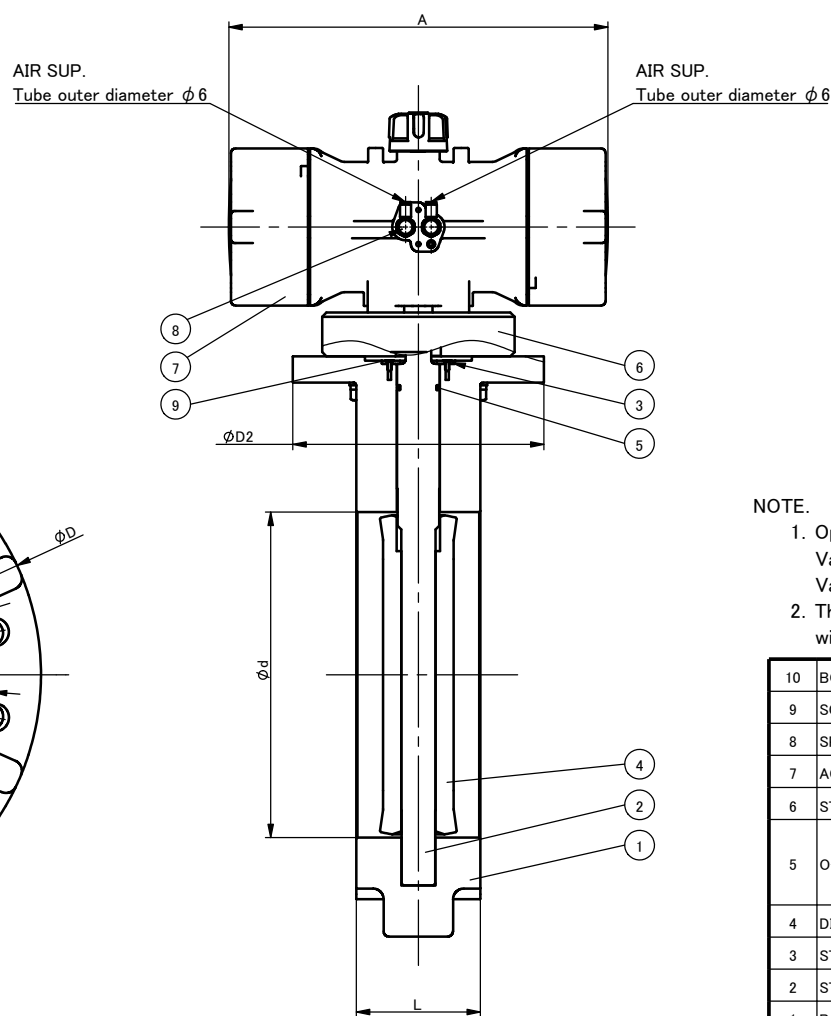


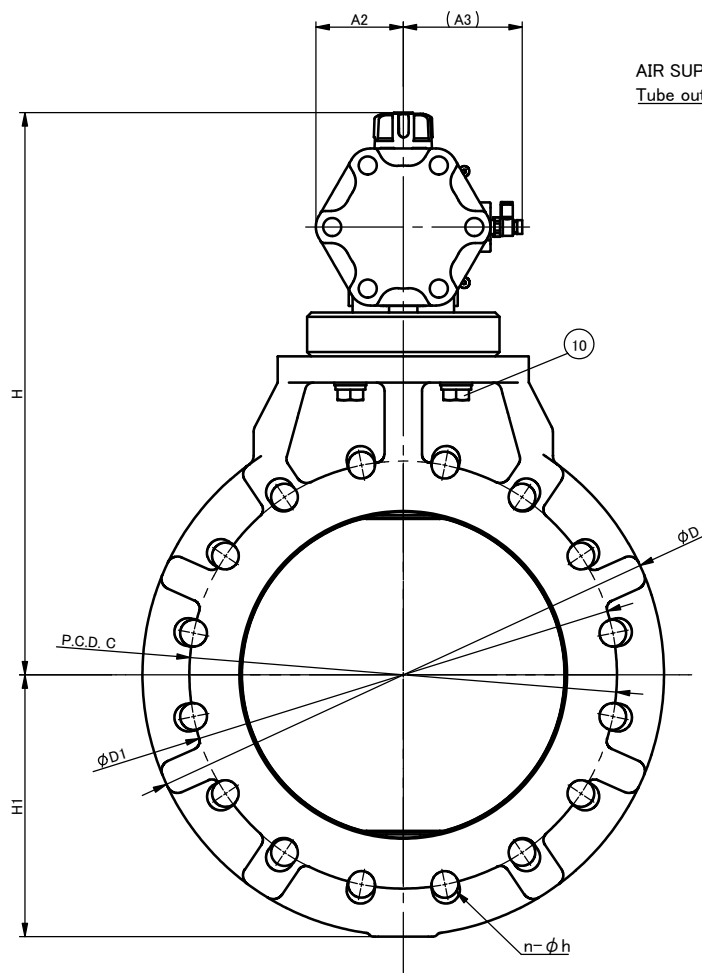

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1	☐ PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT: mm

DIMENSIONS TABLE															Unit: mm	
NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h											
250mm	10"	251	362	12	25	96	421	332	180	469	211	355	82	111	AR100DA22XN	
300	12	303	432	12	25	116	488	400	235	526	244	355	82	111	AR100DA22XN	
350	14	352	476	12	29	116	539	414	235	553	270	355	82	111	AR100DA22XN	

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING — ANSI Class150 250mm (10") ~350mm (14") OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	DRAWING No.	
APPROVED	K. Yoshino	DP-AA071AE _m		
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION		