
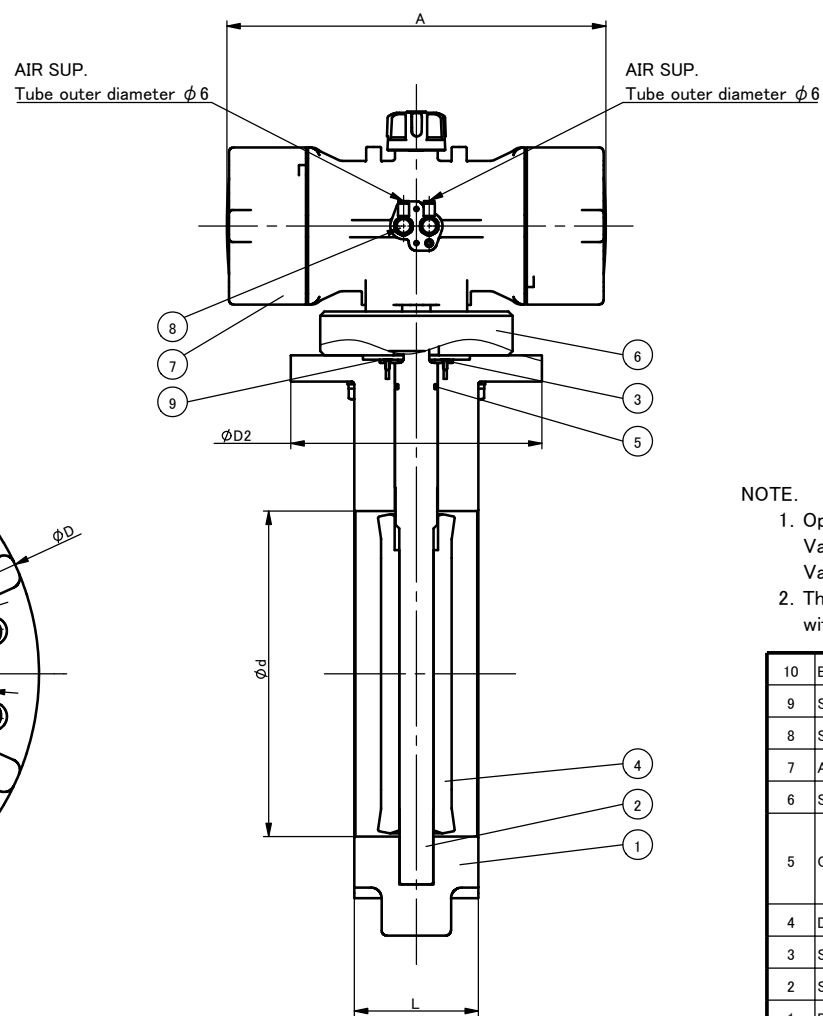


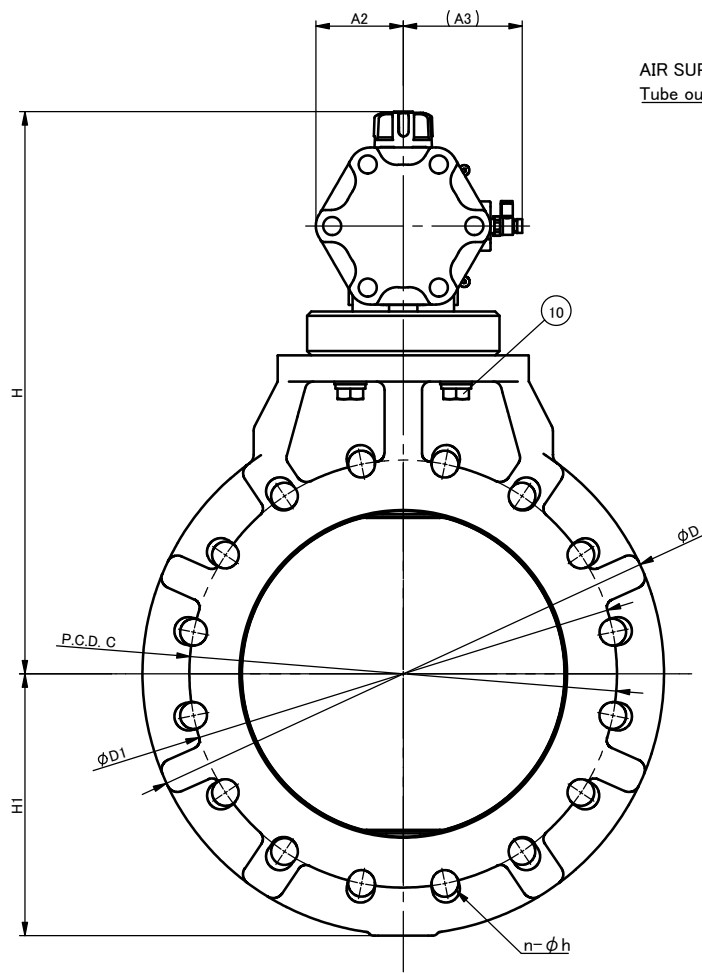

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part (a) Exhaust, Part (b) Supply
Valve shut: Part (a) Supply, Part (b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1	☐ PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	DIN PN10			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h										
250mm	10"	251	350	12	22	96	421	332	180	469	211	355	82	111	AR100DA22XN
300	12	303	400	12	22	116	488	400	235	526	244	355	82	111	AR100DA22XN
350	14	352	460	16	22	116	539	414	235	553	270	355	82	111	AR100DA22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING DIN PN10 250mm (10") ~ 350mm (14") OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024		
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA071DE			
ASAHI YUKIZAI CORPORATION				