
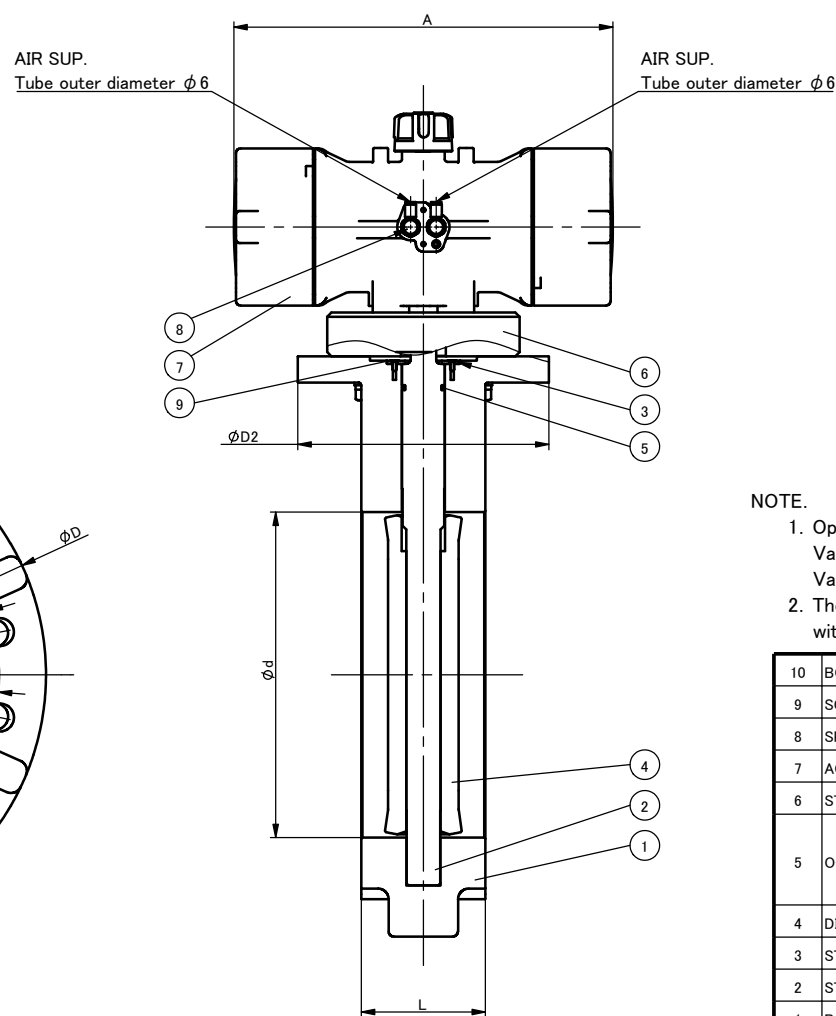


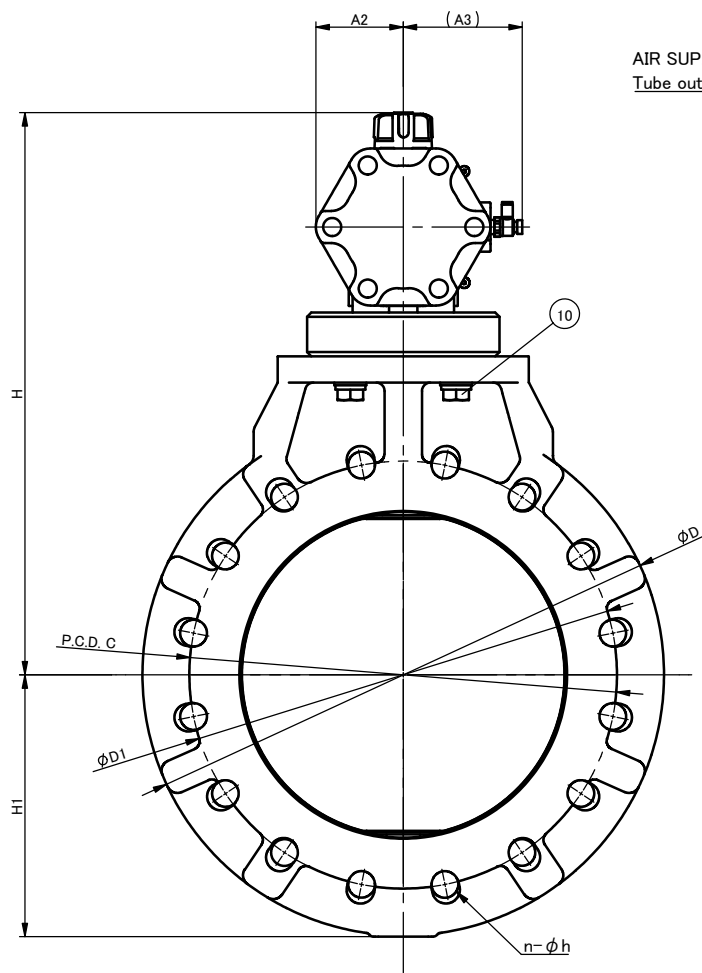

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1	☐ PP	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

NOMINAL SIZE		JIS 5K								JIS 10K								L		D		D1		D2		H		H1		A		A2		A3		ACTUATOR TYPE
		d	C	n	h	C	n	h		C	n	h																								
250mm	10"	251	345	12	23	355	12	25	96	421	332	180	469	211	355	82	111																			AR100DA22XN
300	12	303	390	12	23	400	16	25	116	488	400	235	526	244	355	82	111																			AR100DA22XN
350	14	352	435	12	25	445	16	25	116	539	414	235	553	270	355	82	111																			AR100DA22XN

UNIT: mm

ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y
DOUBLE ACTING

☐JIS5K, ☐JIS 10K
 250mm (10") ~350mm (14")

OPTION:

DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA071JE	
ASAHI YUKIZAI CORPORATION			