
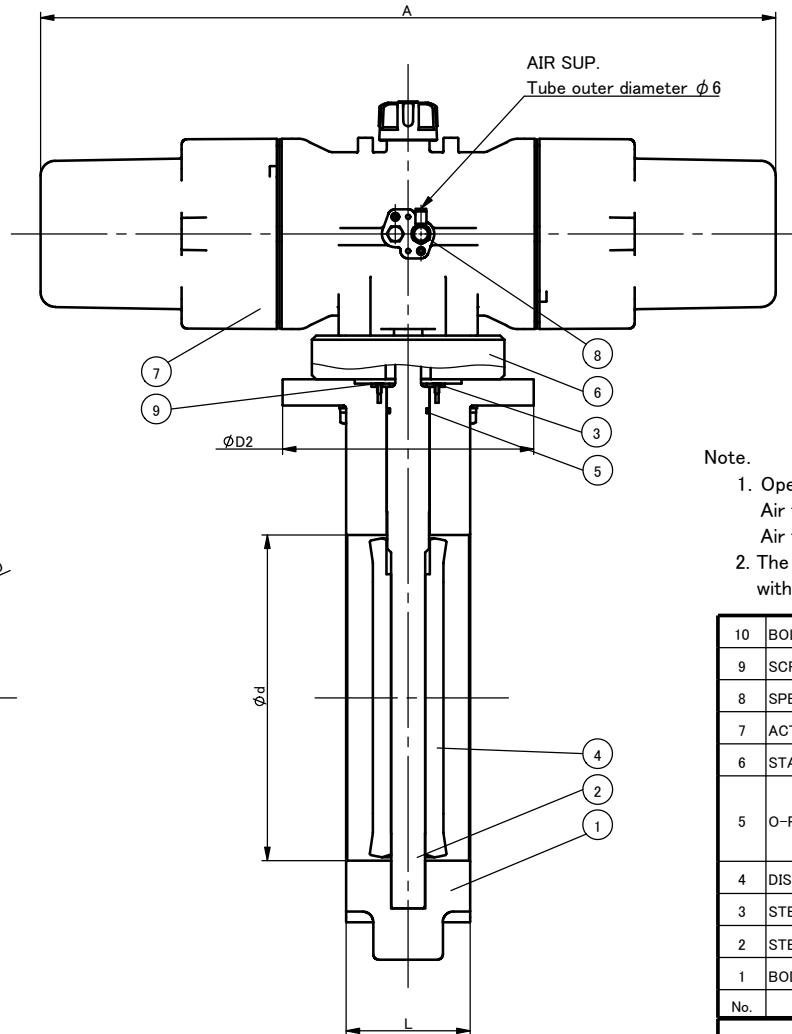


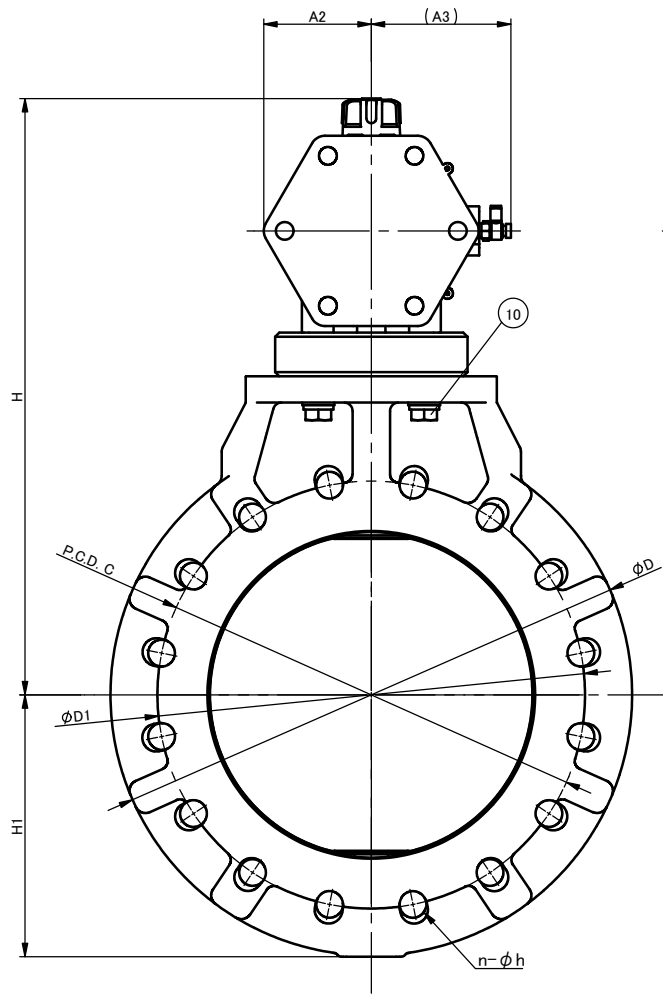

Note.

- Operating pressure 0.4–0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1		
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT : inch

NOMINAL SIZE		d	ANSI Class 150												ACTUATOR TYPE	
			C	n	h											
10"	250mm	9.88	14.25	12	1.00	3.78	16.57	13.07	7.09	18.46	8.31	22.40	3.23	4.37	AR100NC22XN	AR100NO22XN
12	300	11.93	17.00	12	1.00	4.57	19.21	15.75	9.25	21.97	9.61	27.09	3.98	5.16	AR125NC22XN	AR125NO22XN
14	350	13.86	18.75	12	1.12	4.57	21.22	16.30	9.25	23.03	10.63	27.09	3.98	5.16	AR125NC22XN	AR125NO22XN

ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y
☐AIR TO OPEN, ☐AIR TO SHUT

ANSI Class 150
 10" (250mm) ~14" (350mm)

OPTION:

DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA072AE	
ASAHI YUKIZAI CORPORATION			