
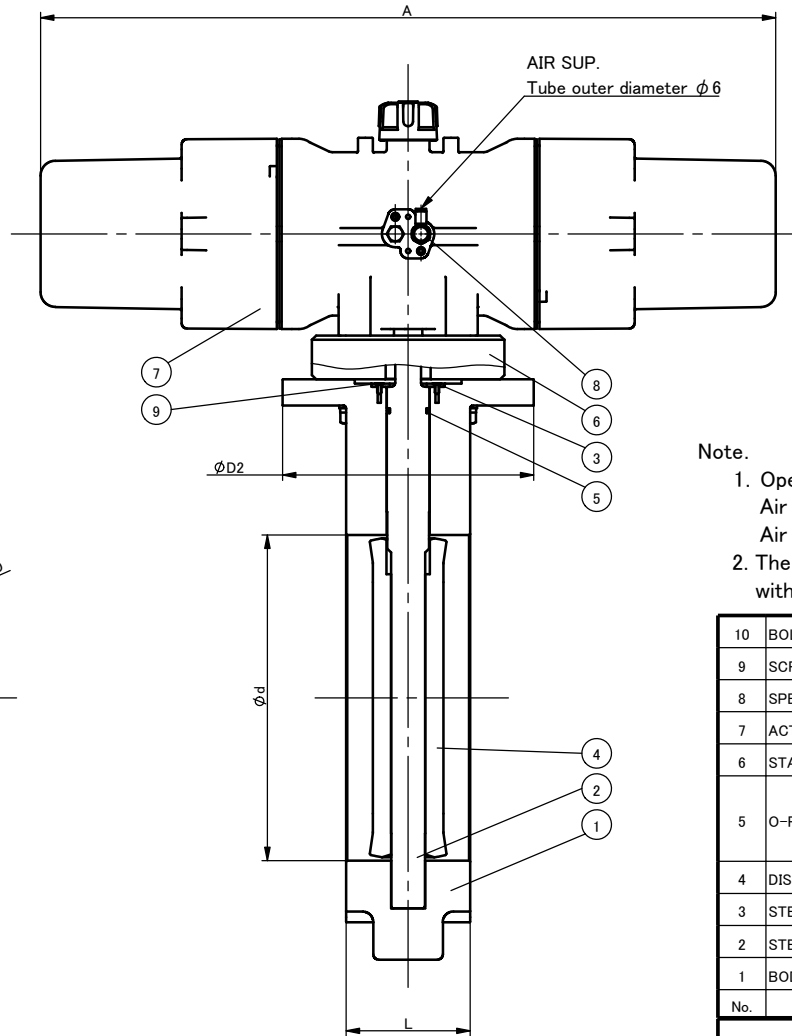


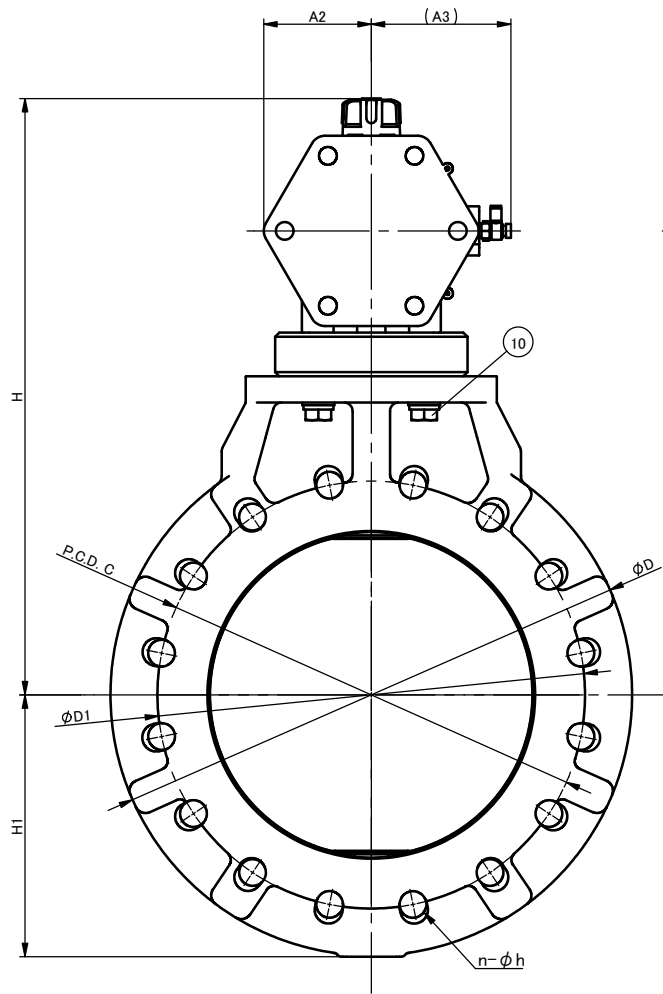

Note.

1. Operating pressure 0.4~0.7MPa G

Air to open :Air-less shut

Air to shut :Air-less open

2. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		DIN PN10													ACTUATOR TYPE	
		d	C	n	h	L	D	D1	D2	H	H1	A	A2	A3	AIR TO OPEN	AIR TO SHUT
250mm	10"	251	350	12	22	96	421	332	180	469	211	569	82	111	AR100NC22XN	AR100NO22XN
300	12	303	400	12	22	116	488	400	235	558	244	688	101	131	AR125NC22XN	AR125NO22XN
350	14	352	460	16	22	116	539	414	235	585	270	688	101	131	AR125NC22XN	AR125NO22XN

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1		
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT DIN PN10 250mm (10") ~350mm (14") OPTION: —					
	DRAWN	N. Ito	<table><tr><td>DATE</td><td>SCALE</td></tr><tr><td>Oct. 15, 2024</td><td></td></tr></table>	DATE	SCALE	Oct. 15, 2024
DATE	SCALE					
Oct. 15, 2024						
CHECKED	Y. Sato	DRAWING No.				
APPROVED	K. Yoshino	DP-AA072DE				
SPECIAL ORDER No.	<table><tr><td></td></tr></table>					
						
	ASAHI YUKIZAI CORPORATION					