
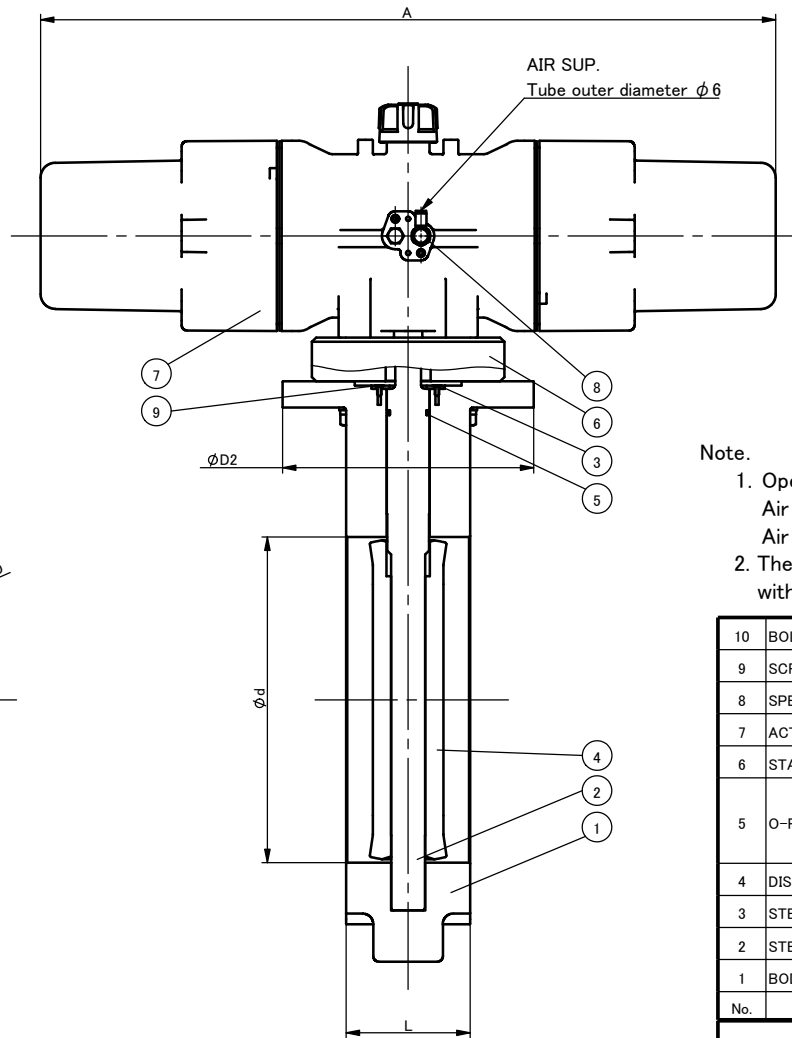


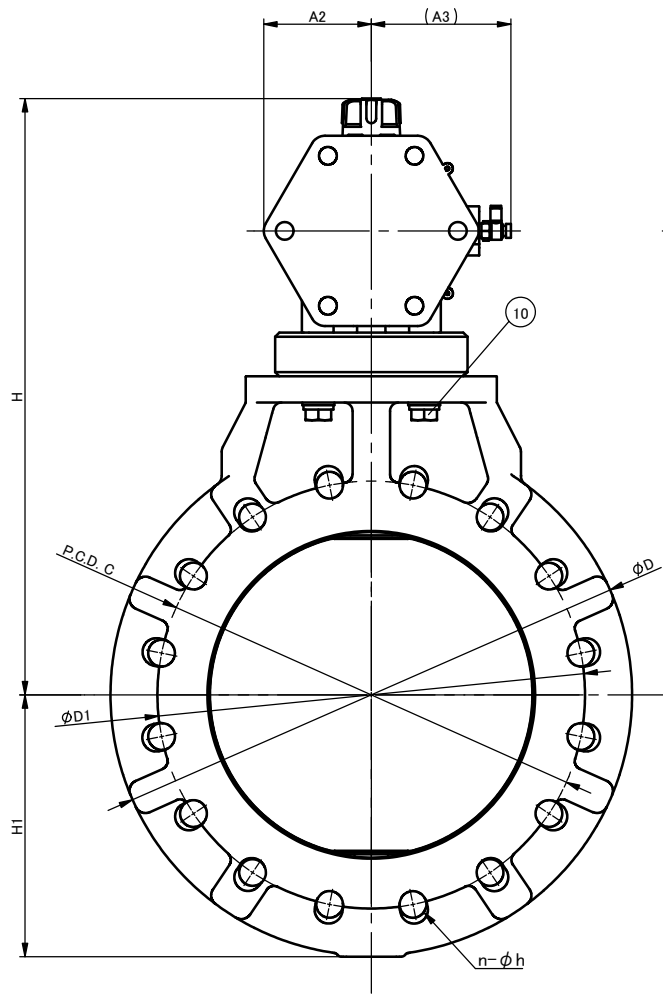

Note.

- Operating pressure 0.4~0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

10	BOLT	4	SUS304(STAINLESS STEEL)	
9	SCREW	4	SUS304(STAINLESS STEEL)	
8	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
7	ACTUATOR	1	PPG etc.	
6	STAND	1	ABS	
5	O-RING	1	☐ EPDM ☐ FKM ☐ Others ()	
4	DISC	1	PP	
3	STEM HOLDER	1	PP	
2	STEM	1	☐ PVC ☐ PP	
1	BODY	1		
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		d	JIS 5K			JIS 10K			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h	C	n	h										AIR TO OPEN	AIR TO SHUT
250mm	10"	251	345	12	23	355	12	25	96	421	332	180	469	211	569	82	111	AR100NC22XN	AR100NO22XN
300	12	303	390	12	23	400	16	25	116	488	400	235	558	244	688	101	131	AR125NC22XN	AR125NO22XN
350	14	352	435	12	25	445	16	25	116	539	414	235	585	270	688	101	131	AR125NC22XN	AR125NO22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT — □JIS5K, □JIS10K 250mm (10") ~350mm (14") OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
	CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA072JE			
ASAHI YUKIZAI CORPORATION				