
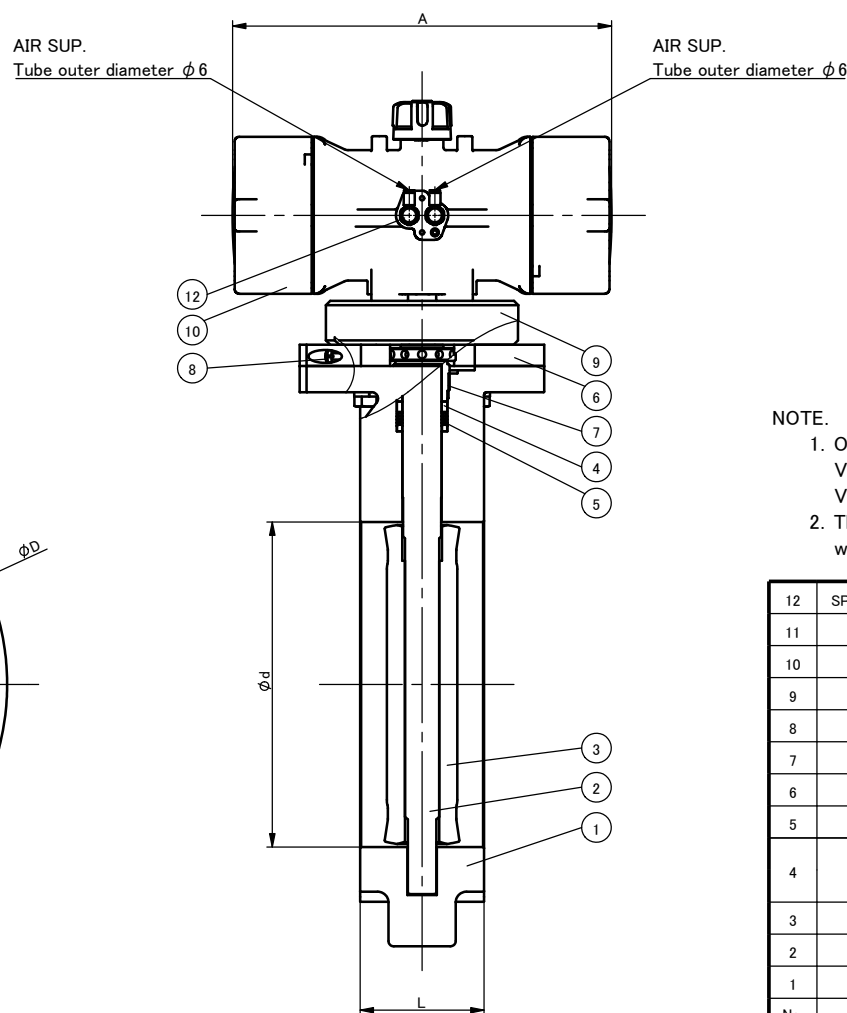


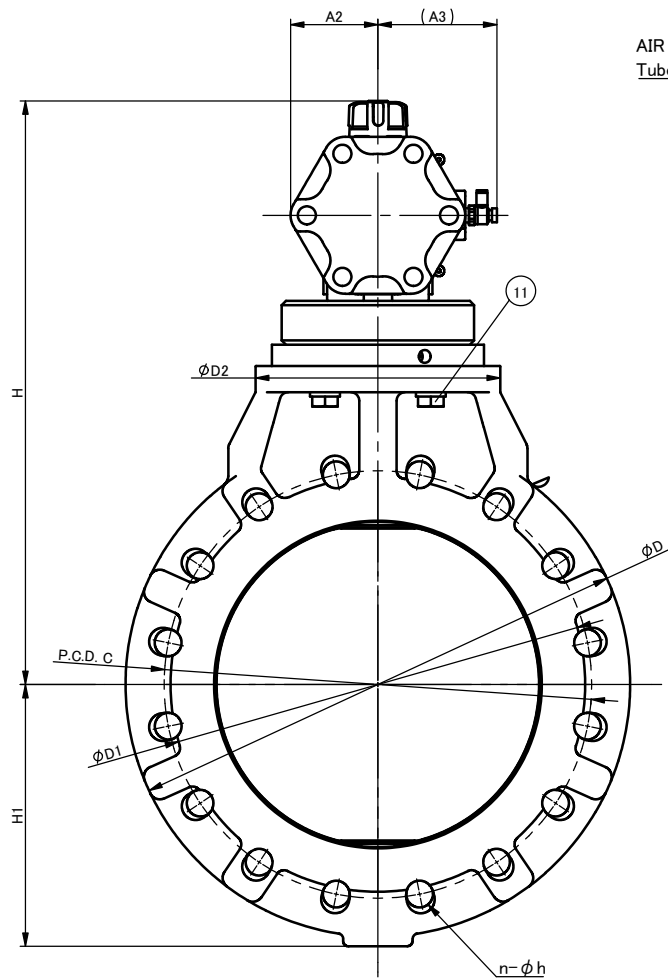

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE PVDF	Used for size 300mm Used for size 350mm
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

NOMINAL SIZE		d	JIS 5K			JIS 10K			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE
			C	n	h	C	n	h										
300mm	12"	303	390	12	23	400	16	25	116	472	388	235	546	245	355	82	111	AR100DA22XN
350	14	352	435	12	25	445	16	25	116	524	404	235	573	270	355	82	111	AR100DA22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING		
	□JIS 5K, □JIS 10K 300mm (12") , 350mm (14")		
OPTION: _____			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	~
APPROVED	K. Yoshino	DRAWING No.	
		DP-AA073JE	
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION		