
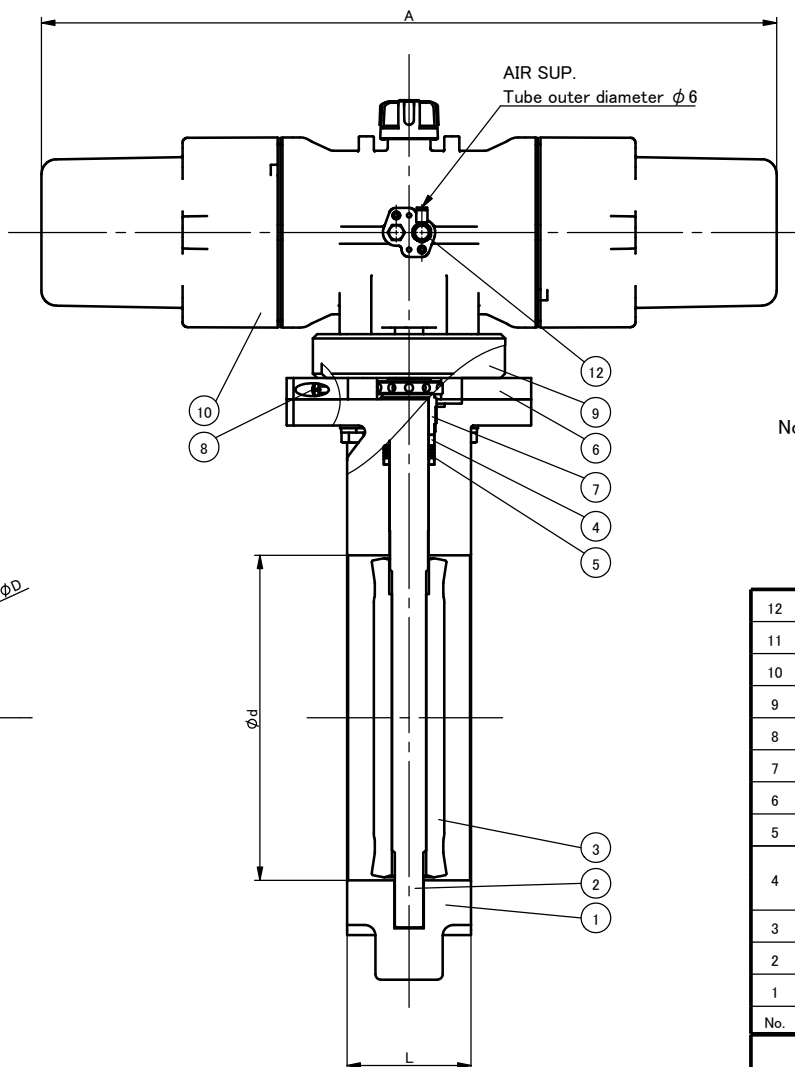


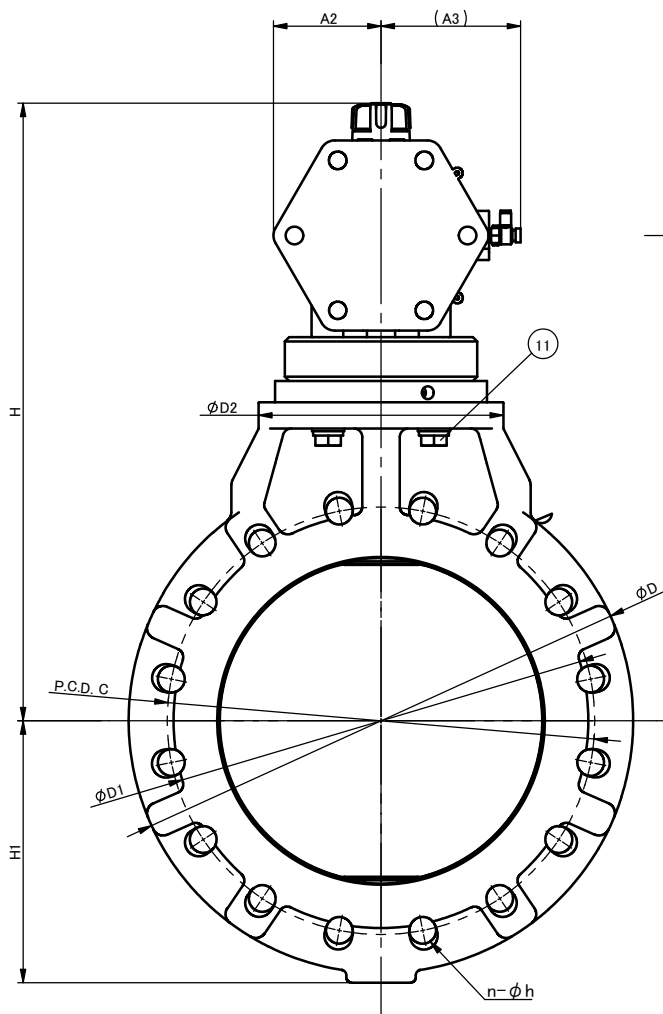

Note.

- Operating pressure 0.4-0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

12	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE PVDF	Used for size 300mm Used for size 350mm
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT: mm

NOMINAL SIZE		d	ANSI Class 150			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h										AIR TO OPEN	AIR TO SHUT
12"	300mm	11.93	17.00	12	1.00	4.57	18.58	15.28	9.25	22.76	9.65	27.09	3.98	5.16	AR125NC22XN	AR125NO22XN
14	350	13.86	18.75	12	1.12	4.57	20.63	15.91	9.25	23.82	10.63	27.09	3.98	5.16	AR125NC22XN	AR125NO22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT — ANSI Class 150 12" (300mm) , 14" (350mm) OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024		
APPROVED	K. Yoshino	DRAWING No.		
SPECIAL ORDER No.	DP-AA074AE			
ASAHI YUKIZAI CORPORATION				