
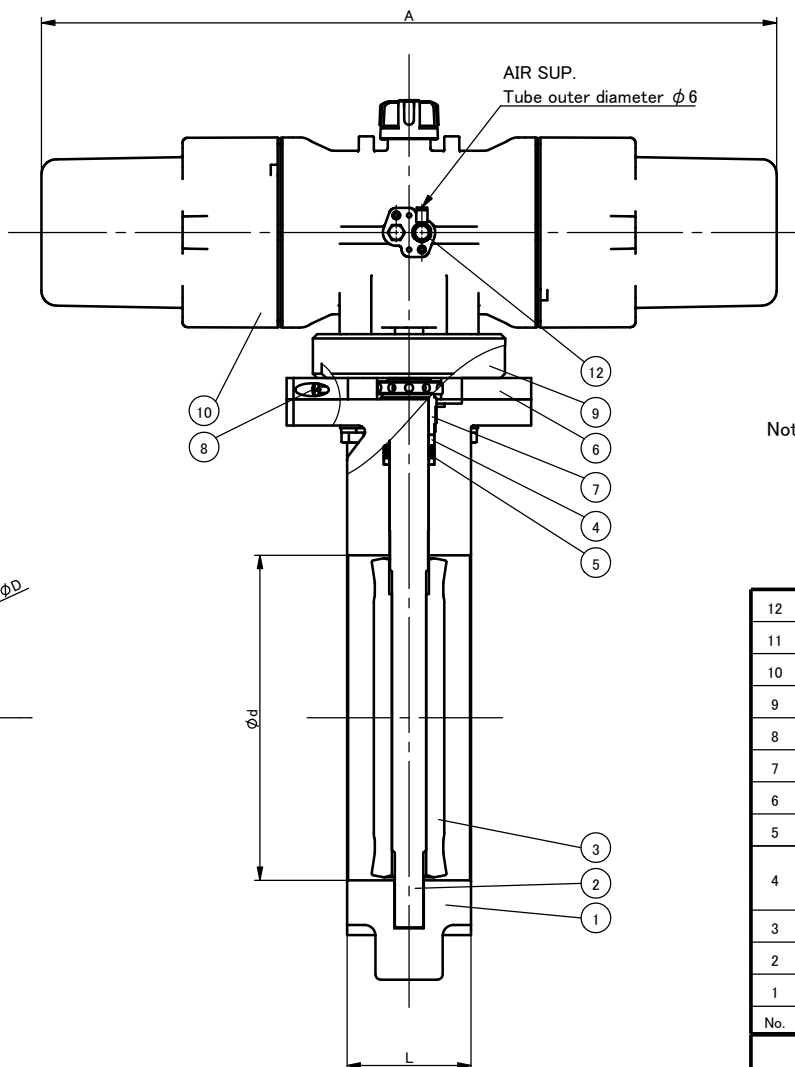


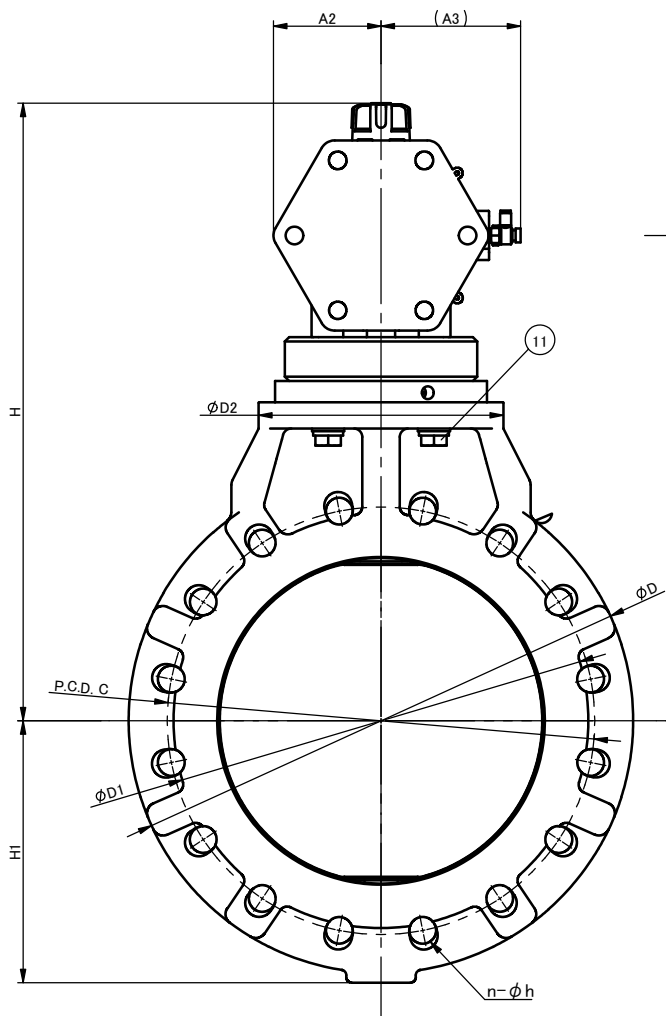

Note.

- Operating pressure 0.4–0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

12	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE PVDF	Used for size 300mm Used for size 350mm
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

UNIT: mm

NOMINAL SIZE		d	DIN PN10												ACTUATOR TYPE	
			C	n	h										AIR TO OPEN	AIR TO SHUT
300mm	12"	303	400	12	22	116	472	388	235	578	245	688	101	131	AR125NC22XN	AR125NO22XN
350	14	352	460	16	22	116	524	404	235	605	270	688	101	131	AR125NC22XN	AR125NO22XN

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y □AIR TO OPEN, □AIR TO SHUT DIN PN10 300mm (12"), 350mm (14") OPTION: —			
	DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	DRAWING No.	
APPROVED	K. Yoshino	DP-AA074DE		
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION		