
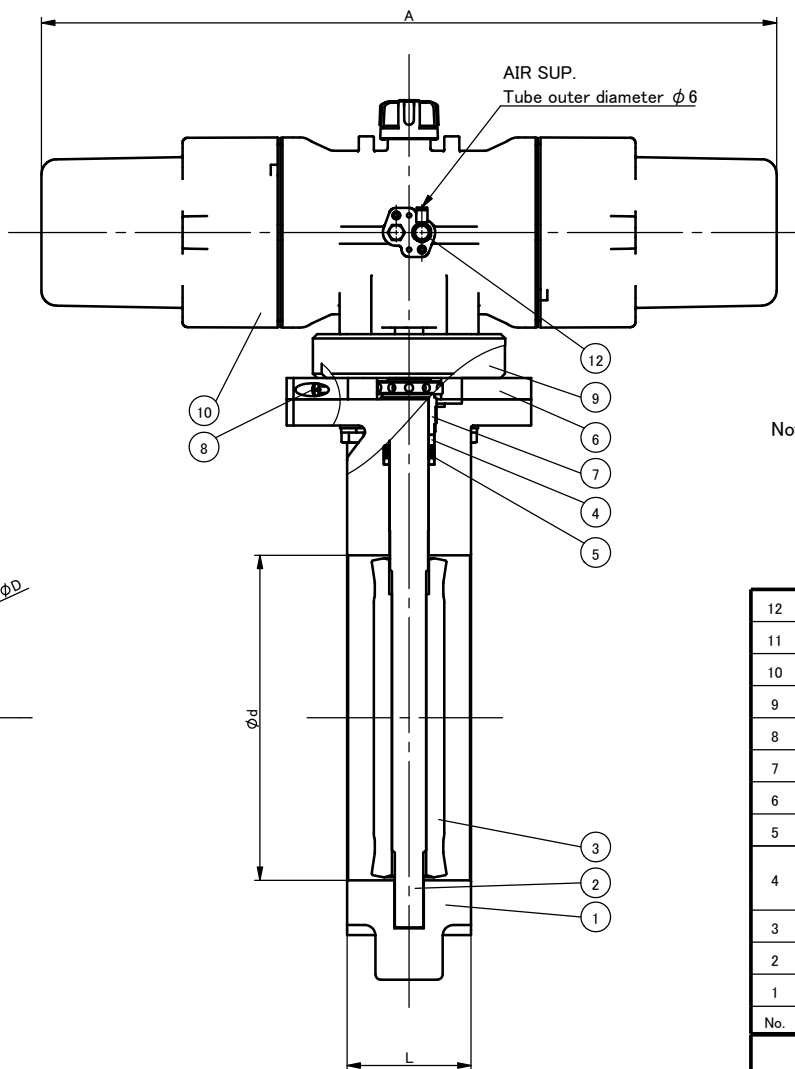


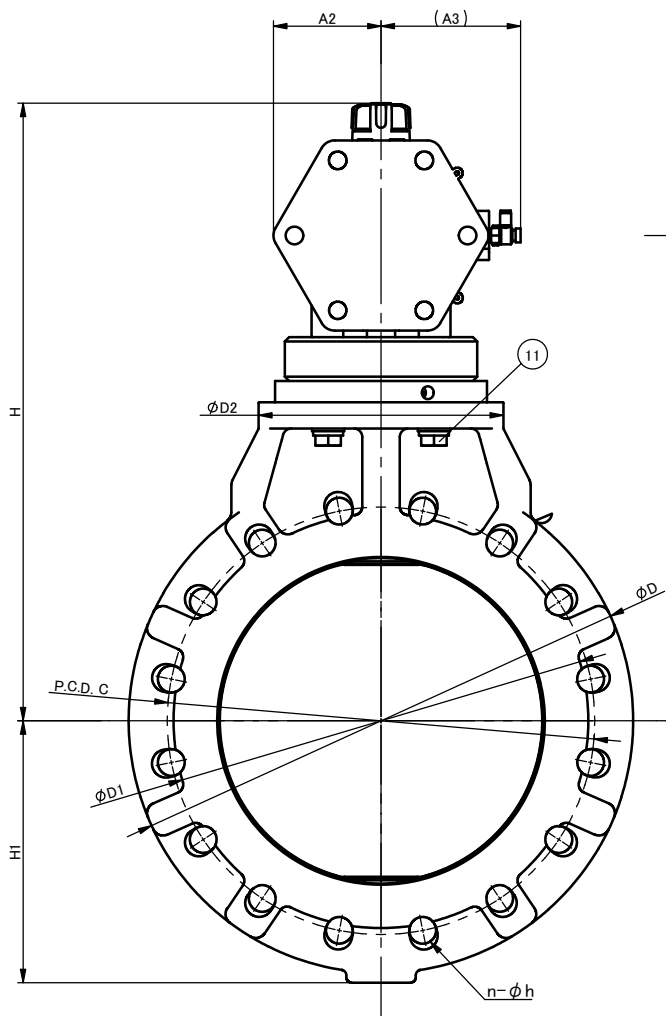

Note.

- Operating pressure 0.4~0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

12	SPEED CONTROLLER	1	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE PVDF	Used for size 300mm Used for size 350mm
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

DIMENSIONS TABLE

NOMINAL SIZE		JIS 5K								JIS 10K								ACTUATOR TYPE			
		d	C	n	h	C	n	h	L	D	D1	D2	H	H1	A	A2	A3	AIR TO OPEN	AIR TO SHUT		
300mm	12"	303	390	12	23	400	16	25	116	472	388	235	578	245	688	101	131	AR125NC22XN	AR125NO22XN		
350	14	352	435	12	25	445	16	25	116	524	404	235	605	270	688	101	131	AR125NC22XN	AR125NO22XN		

UNIT : mm

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y ☐ AIR TO OPEN, ☐ AIR TO SHUT — ☐ JIS 5K, ☐ JIS10K 300mm (12") , 350mm (14") OPTION: —									
	DRAWN	N. Ito	<table><tr><td>DATE</td><td>SCALE</td></tr><tr><td>Oct. 15, 2024</td><td></td></tr></table>	DATE	SCALE	Oct. 15, 2024				
	DATE	SCALE								
Oct. 15, 2024										
CHECKED	Y. Sato	<table><tr><td colspan="2">DRAWING No.</td></tr><tr><td>APPROVED</td><td>K. Yoshino</td></tr><tr><td colspan="2">DP-AA074JE</td></tr><tr><td colspan="2"></td></tr></table>	DRAWING No.		APPROVED	K. Yoshino	DP-AA074JE			
DRAWING No.										
APPROVED	K. Yoshino									
DP-AA074JE										
										
SPECIAL ORDER No.										
ASAHI YUKIZAI CORPORATION										