
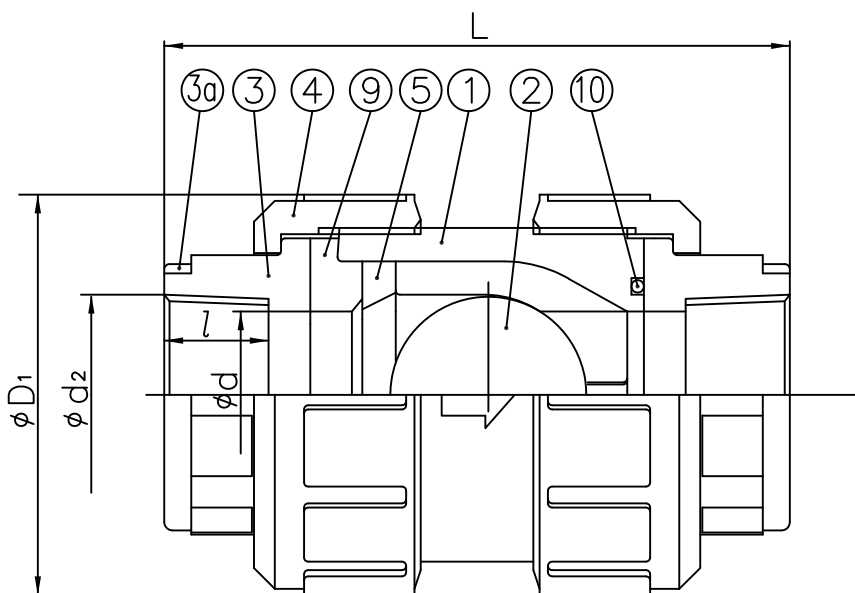
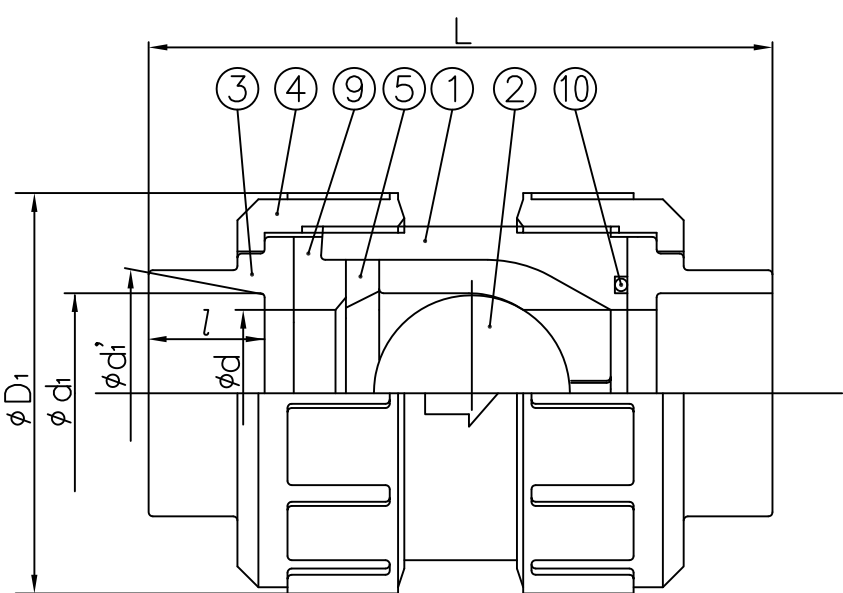


FLANGED END

SOCKET END

THREADED END

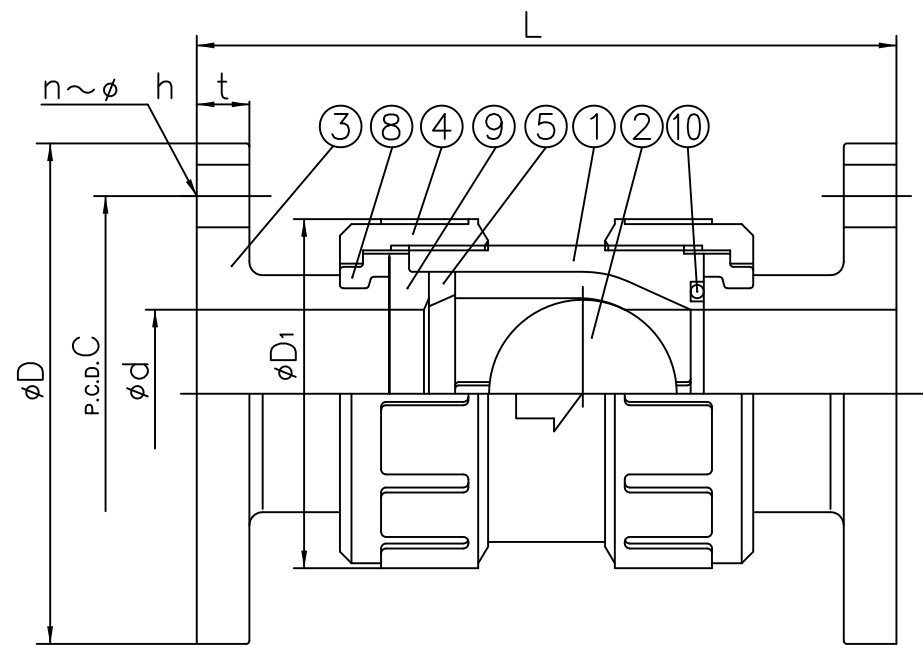

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE			FLANGED END							SOCKET END							THREADED END			
			DIN PN10				L			PVC ,C-PVC			PVDF , PP						L	
							PVC C-PVC	PP PVDF												
			D	C	n	h		d ₁	<i>l</i>	L	d ₁	d ₁ '	<i>l</i>	L	d ₂	<i>l</i>	PVC C-PVC	PP PVDF		
15 ^{mm} 1/2"	15	48	95	65	4	14	130	128	12	20	16	84	19.50	19.30	14	79	Rp 1/2	15	86	83
20 3/4	20	60	105	75	4	14	155	154	14	25	19	100	24.50	24.30	16	93	Rp 3/4	17	103	98
25 1	25	70	115	85	4	14	165	163	14	32	22	113	31.50	31.30	18	103	Rp 1	20	113	109
40 1 1/2	40	96	150	110	4	18	192	190	16	50	31	158	49.45	49.20	23	141	Rp 1 1/2	25	151	147
50 2	51	106	165	125	4	18	214	211	16	63	38	190	62.50	62.10	27	167	Rp 2	28	177	171

NOTE. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

3a	RING ¹⁾	2	STAINLESS STEEL (SUS304)	1) ¹⁾ C-PVC body, threaded end : used for 15~25mm 2) ²⁾ used for Flanged end
10	O-RING	1	EPDM	
9	SEAT	1	□EPDM □FKM □others()	
8	STOP RING(B) ²⁾	2	PVDF	
5	STOP RING(A)	1	□ PVC □ C-PVC □ PP □ PVDF	
4	UNION NUT	2		
3	END CONNECTOR	2		
2	BALL	1		
1	BODY	1		
No.	DESCRIPTION	No.REQ'D	MATERIAL	REMARKS
TRUE UNION BALL CHECK VALVE ASS'Y DIN : □ FLANGED END, □ SOCKET END, □ THREADED END 15 ^{mm} (1/2 ") ~ 50 ^{mm} (2 ")				
DRAWN	H.Iguchi	DATE	SCALE	
CHECKED	A.Kuroki	MAR.9.2007	〰	
APPROVED	K.Ohnishi	DRAWING No.		
		TC-60001DE		△
SPECIAL ORDER No.				
ASAHI YUKIZAI CORPORATION				