
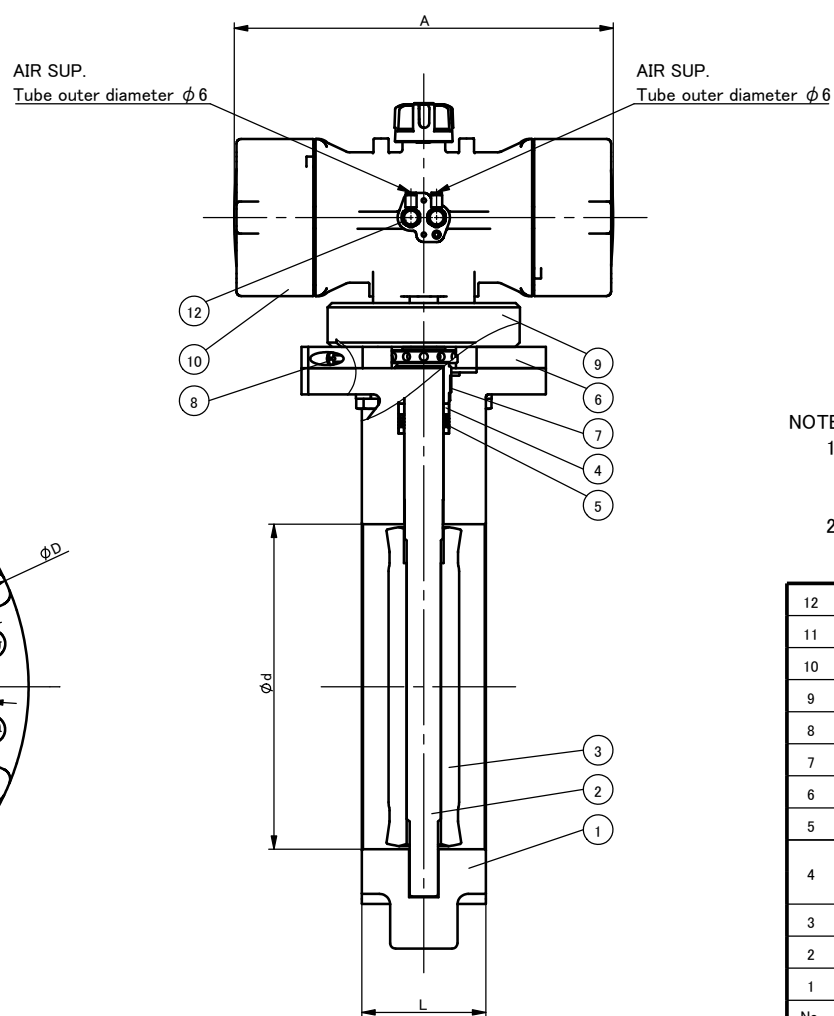


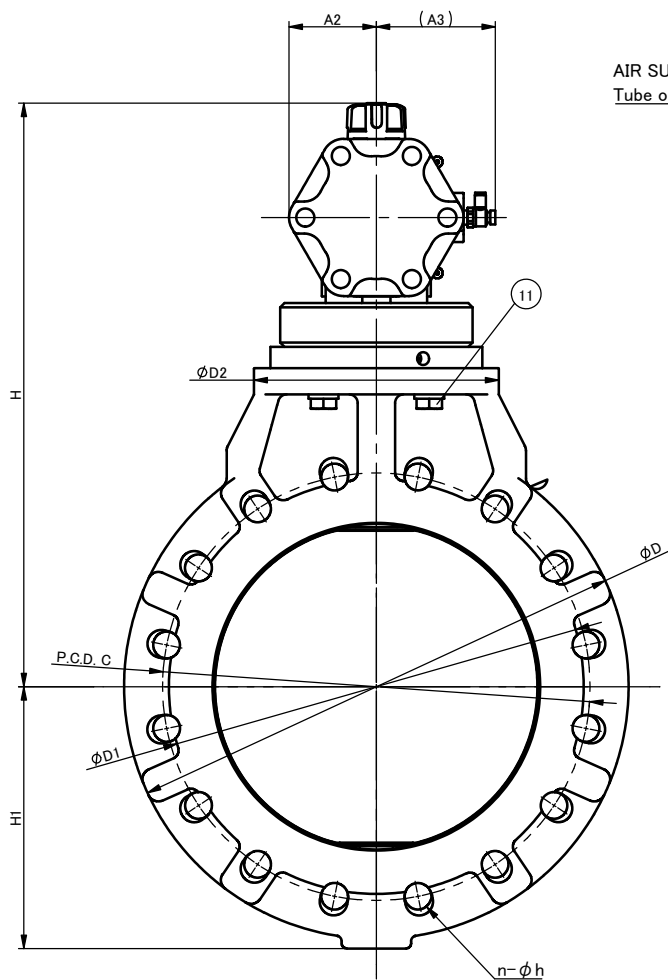

DIMENSIONS TABLE

NOMINAL SIZE		d	DIN PN10			L	D	D1	D2	H	H1	A	A2	A3	ACTUATOR TYPE	
			C	n	h											
300mm	12"	303	400	12	22	116	472	388	235	546	245	355	82	111		AR100DA22XN
350	14	352	460	16	22	116	524	404	235	573	270	355	82	111		AR100DA22XN

NOTE.

- Operating pressure 0.4~0.7MPa G
Valve open: Part(a) Exhaust, Part(b) Supply
Valve shut: Part(a) Supply, Part(b) Exhaust
- The shape and appearance of assembly differ a little with nominal size and material compared to this drawing.

12	SPEED CONTROLLER	2	SUS303(STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304(STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	ABS	
8	SCREW	1	SUS304(STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE	Used for size 300mm
			PVDF	Used for size 350mm
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y DOUBLE ACTING DIN PN10 300mm (12"), 350mm (14") OPTION:		
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	~
APPROVED	K. Yoshino	DRAWING No. DP-AA073DE	
SPECIAL ORDER No.		ASAHI YUKIZAI CORPORATION	