
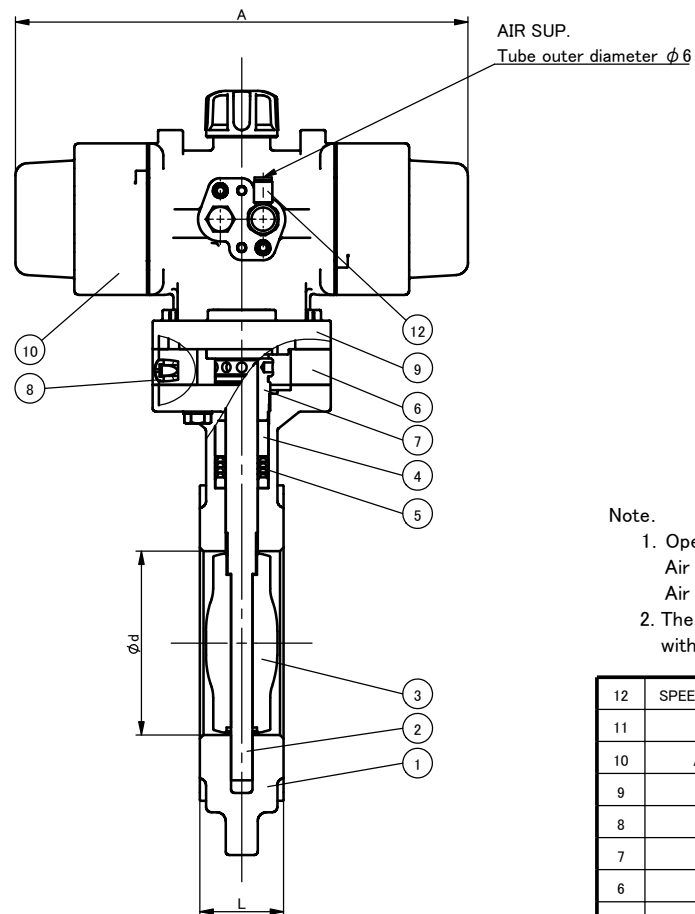


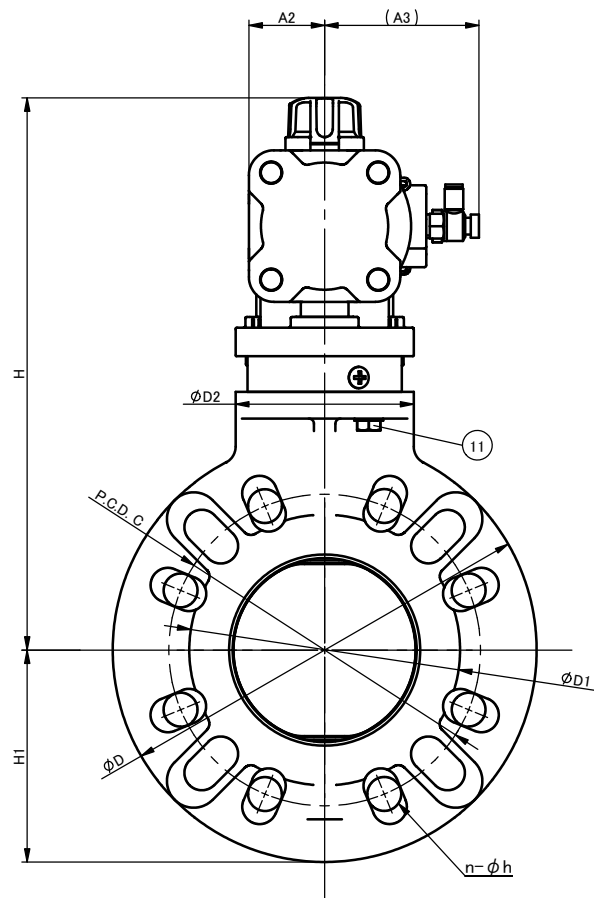

Note.

- Operating pressure 0.4-0.7MPa G
Air to open :Air-less shut
Air to shut :Air-less open
- The shape and appearance of assembly differ a little with nominal size compared to this drawing.

DIMENSIONS TABLE

UNIT : mm

NOMINAL SIZE		JIS 5K			JIS 10K			ACTUATOR TYPE									
		d	C	n	h	C	n	h	L	D	D1	D2	H	H1	A	A2	A3
40mm	1 1/2"	46	95	4	15	105	4	19	32	150	86	100	241	75	194	35.0	79
50	2	57	105	4	15	120	4	19	35	165	96	100	251	83	194	35.0	79
65	2 1/2	70	130	4	15	140	4	19	37	185	116	100	261	93	194	35.0	79
80	3	78	145	4	19	150	8	19	37	211	120	100	295	106	254	42.5	87
100	4	103	165	8	19	175	8	19	47	238	152	100	310	119	254	42.5	87
125	5	129	200	8	19	210	8	23	57	255	190	140	346	128	438	58.5	89
150	6	150	230	8	19	240	8	23	62	285	208	140	361	143	438	58.5	89
200	8	195	280	8	23	290	12	23	76	350	264	140	432	175	569	82.0	111
250	10	251	345	12	23	355	12	25	96	409	322	180	489	205	569	82.0	111

12	SPEED CONTROLLER	1	SUS303 (STAINLESS STEEL) etc.	AS2201FG-02-06A
11	BOLT	4	SUS304 (STAINLESS STEEL)	
10	ACTUATOR	1	PPG etc.	
9	STAND	1	PPG	
8	SCREW	1	SUS304 (STAINLESS STEEL)	
7	GLAND	1	PVDF	
6	SPACER	1	C-PVC	
5	V-PACKING	4	PTFE	
4	BUSH	1	PTFE	
3	DISC	1	PVDF	
2	STEM	1	PVDF	
1	BODY	1	PVDF	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	ROTARY DAMPER TYPE 57 PNEUMATIC MODEL TYPE AR Ass'y		
	□AIR TO OPEN, □AIR TO SHUT		
	□JIS5K, □JIS 10K 40mm(1 1/2") ~250mm(10")		
OPTION:			
DRAWN	N. Ito	DATE	SCALE
CHECKED	Y. Sato	Oct. 15, 2024	
APPROVED	K. Yoshino	DRAWING No.	
SPECIAL ORDER No.		DP-AA063JE	
ASAHI YUKIZAI CORPORATION			