


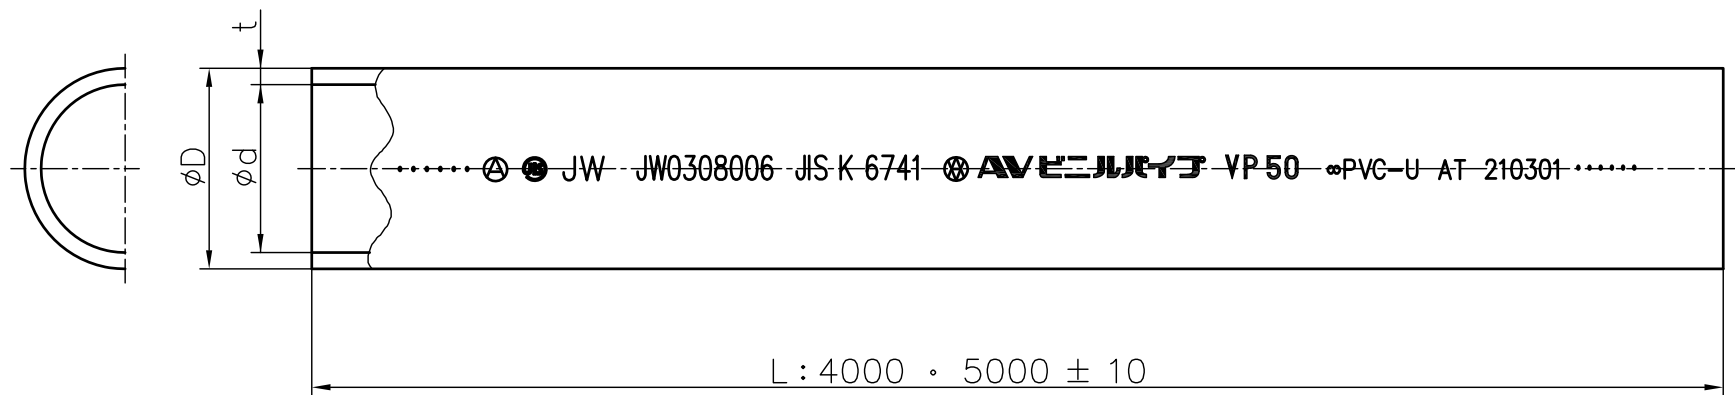

DIMENSIONS TABLE

UNIT: mm

NOMINAL SIZE	VP							VU					
	D (Outer diameter)			t (Thickness)		d	Calculated Weight (Reference) (kg / m)	D (Outer diameter)		t (Thickness)		d	Calculated Weight (Reference) (kg / m)
	Standard Dimension	For max and min.	For average	Min imum	Tolerance			Standard Dimension	For average	Min imum	Tolerance		
40 ^{mm}	48.0	±0.3	±0.2	3.6	+0.8	40	0.791	48.0	±0.2	1.8	+0.4	44	0.413
50	60.0	±0.4	±0.2	4.1	+0.8	51	1.122	60.0	±0.2	1.8	+0.4	56	0.521
65	76.0	±0.5	±0.3	4.1	+0.8	67	1.445	76.0	±0.3	2.2	+0.6	71	0.825
75	89.0	±0.5	±0.3	5.5	+0.8	77	2.202	89.0	±0.3	2.7	+0.6	83	1.159
100	114.0	±0.6	±0.4	6.6	+1.0	100	3.409	114.0	±0.4	3.1	+0.8	107	1.737
125	140.0	±0.8	±0.5	7.0	+1.0	125	4.464	140.0	±0.5	4.1	+0.8	131	2.739
150	165.0	±1.0	±0.5	8.9	+1.4	146	6.701	165.0	±0.5	5.1	+0.8	154	3.941
200	216.0	±1.3	±0.7	10.3	+1.4	194	10.129	216.0	±0.7	6.5	+1.0	202	6.572
250	267.0	±1.6	±0.9	12.7	+1.8	240	15.481	267.0	±0.9	7.8	+1.2	250	9.758
300	318.0	±1.9	±1.0	15.1	+2.2	286	21.962	318.0	±1.0	9.2	+1.4	298	13.701

JIS K 6741

No.	DESCRIPTION	QTY.	PVC MATERIAL	REMARKS
ITEM	AV PVC PIPE (VP,VU TYPE) 40mm~300mm			
DRAWN	M.Iwakiri	DATE	SCALE	
CHECKED	H.Kawano	MAR.10.2021		
APPROVED	K.Koushou	DRAWING No.		
		PT-60001JE		
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION			